





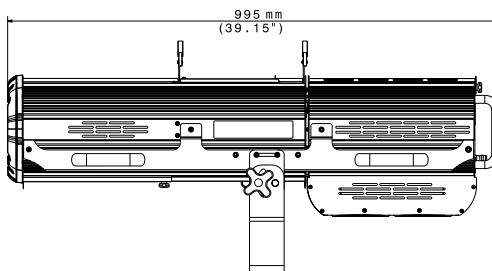

PHARUS 1500W MB

THE FOLLOWSPOT

PHARUS is a **follow spot fitted with a discharge lamp** ideal for all professional applications (theatres, concerts, television studios, fashion displays, special events, etc).



03.TP005.L

OUTPUT

- Optical group with condenser lens
- Linear zoom 7° ÷ 16°
- Linear focus
- Linear iris-diaphragm
- Mechanical dimmer with black-out

COLORS

- Colour changer (optional): 5 interchangeable gel filter holders
- Automatic switching system between colours

GOBOS

Gobo holder for gobo projections (optional)

SAFETY

Safety micro switches

POWER SUPPLY

- External electromagnetic ballast range 220-240Vac 50-60 Hz
- Power consumption: 1600VA with PFC

OPERATING TEMPERATURE

-10° / 40° C

PHYSICAL

- IP20
- Housing: aluminium and stainless steel
- Removable cover for easy access to lamp
- Weight: Pharus: 20.5 Kg (45.2 lbs) + Electromagnetic ballast: 17.9 Kg (43.9 lbs)
- Finishing: Black

SHIPPING

- Packaging: Carton box
- Box size (LxHxD): 1070 x 480 x 440 mm + 350 x 340 x 310 mm (42.1" x 18.9" x 17.3" + 13.8" x 13.4" x 12.2")
- Weight: 45 Kg (99.2 lbs)

ACCESSORIES ON REQUEST

- Lamp HTI 1500W (code 0505S021)
- Gobo Holder Type B (code 03.TA205)
- Colorchanger (code 03.TA204)
- Professional Tripod 90x140 cm max.40 kg (code 0521A007)
- 1 unit flightcase (code 0521C034)

PHOTOMETRIC DATA

	mt 5 ft 16.40	mt 10 ft 32.81	mt 15 ft 49.21	mt 20 ft 65.62	mt 25 ft 82.02
BEAM ANGLE 7°					
lux center (lx)	28000	7000	3111	1750	1120
foot candles (fc)	2602	651	289	163	104
diameter (cm)	61	122	183	245	306
diameter (ft)	2.01	4.01	6.02	8.03	10.03
BEAM ANGLE 16°					
lux center (lx)	8000	2000	889	500	320
foot candles (fc)	743	186	83	46	30
diameter (cm)	141	281	422	562	703
diameter (ft)	4.61	9.22	13.83	18.44	23.05