




ARTEMIO PROFILE 5000K

Photometric Chart

Optical group ULTRA-NARROW

LED CURRENT 700mA

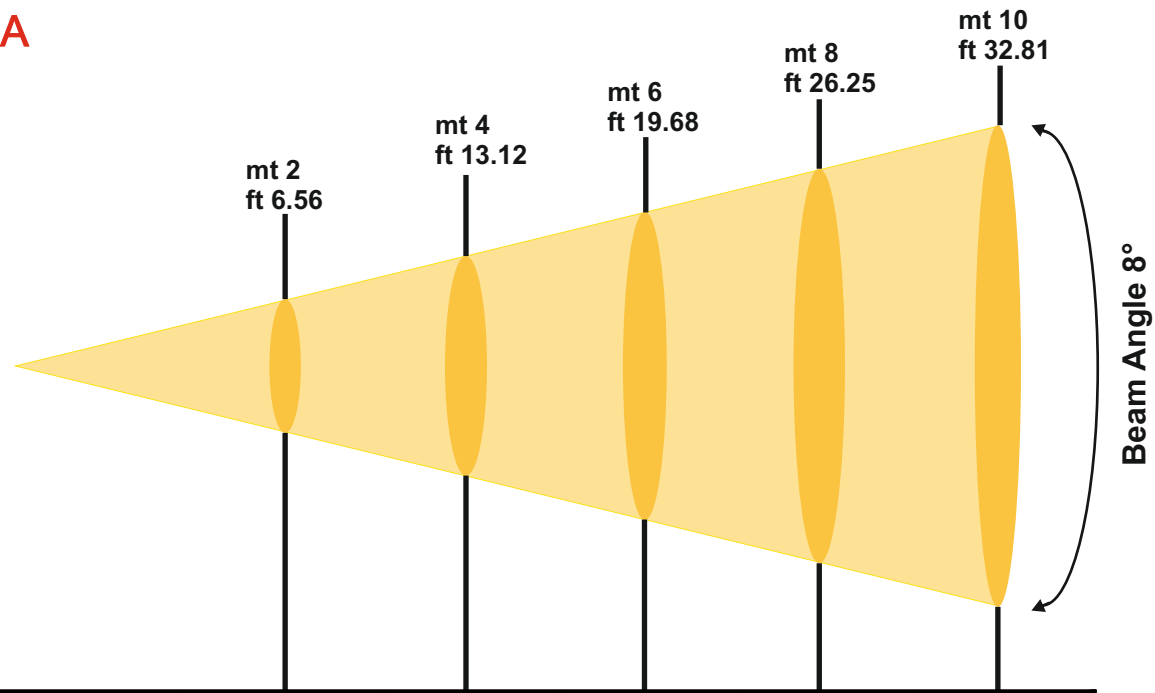

Lux center [lx]	4516	1129	502	282	181
Foot candles [fc]	420	105	47	26	17
Diameter [cm]	28	56	84	112	140
Diameter [ft]	0.92	1.84	2.75	3.67	4.59

Beam Angle 8°




ARTEMIO PROFILE 5000K

Photometric Chart

Optical group NARROW (13°)

LED CURRENT 700mA

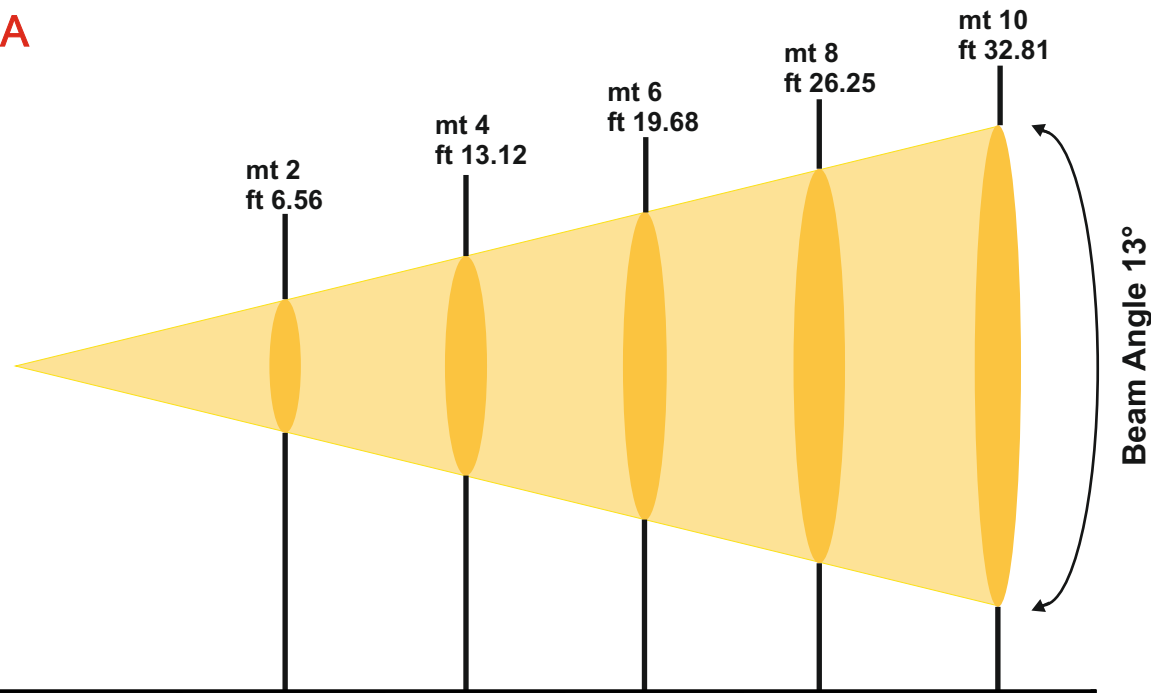

Lux center [lx]	3686	921	410	230	147
Foot candles [fc]	343	86	38	21	15
Diameter [cm]	46	91	137	182	228
Diameter [ft]	1.50	2.99	4.49	5.98	7.48

Beam Angle 13°




ARTEMIO PROFILE 5000K

Photometric Chart

Optical group NARROW (18°)

LED CURRENT 700mA

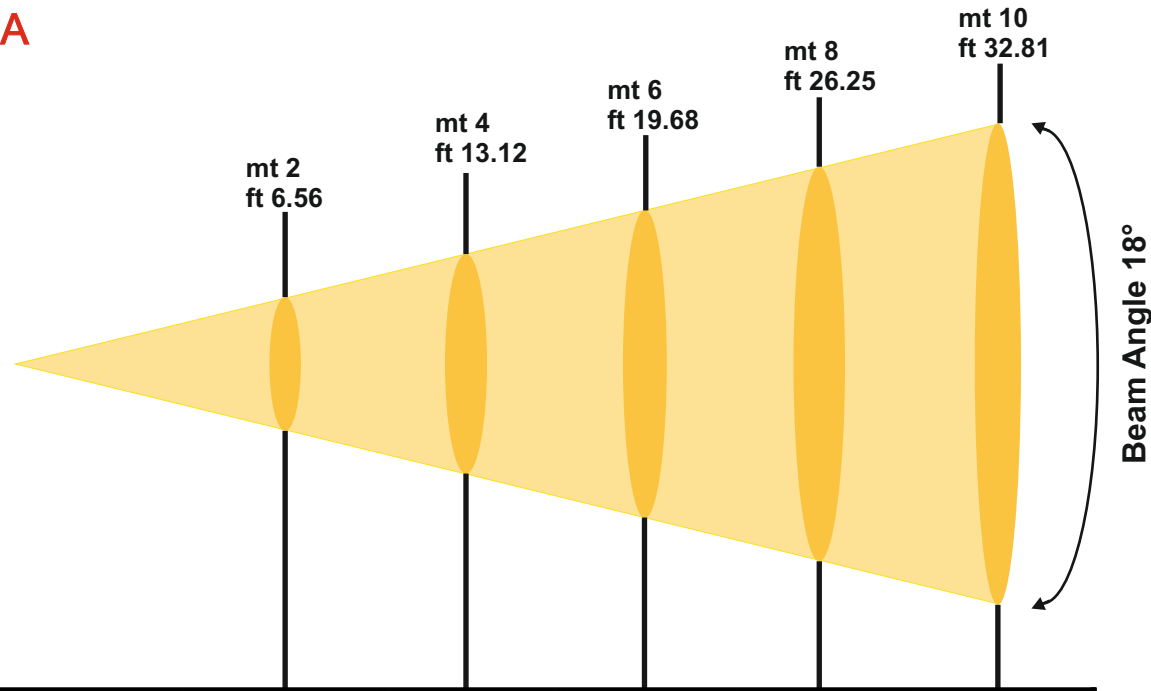

Lux center [lx]	1616	404	180	101	65
Foot candles [fc]	150	38	17	10	8
Diameter [cm]	63	127	190	253	317
Diameter [ft]	2.08	4.16	6.24	8.31	10.39

Beam Angle 18°




ARTEMIO PROFILE 5000K

Photometric Chart

Optical group MEDIUM

LED CURRENT 700mA

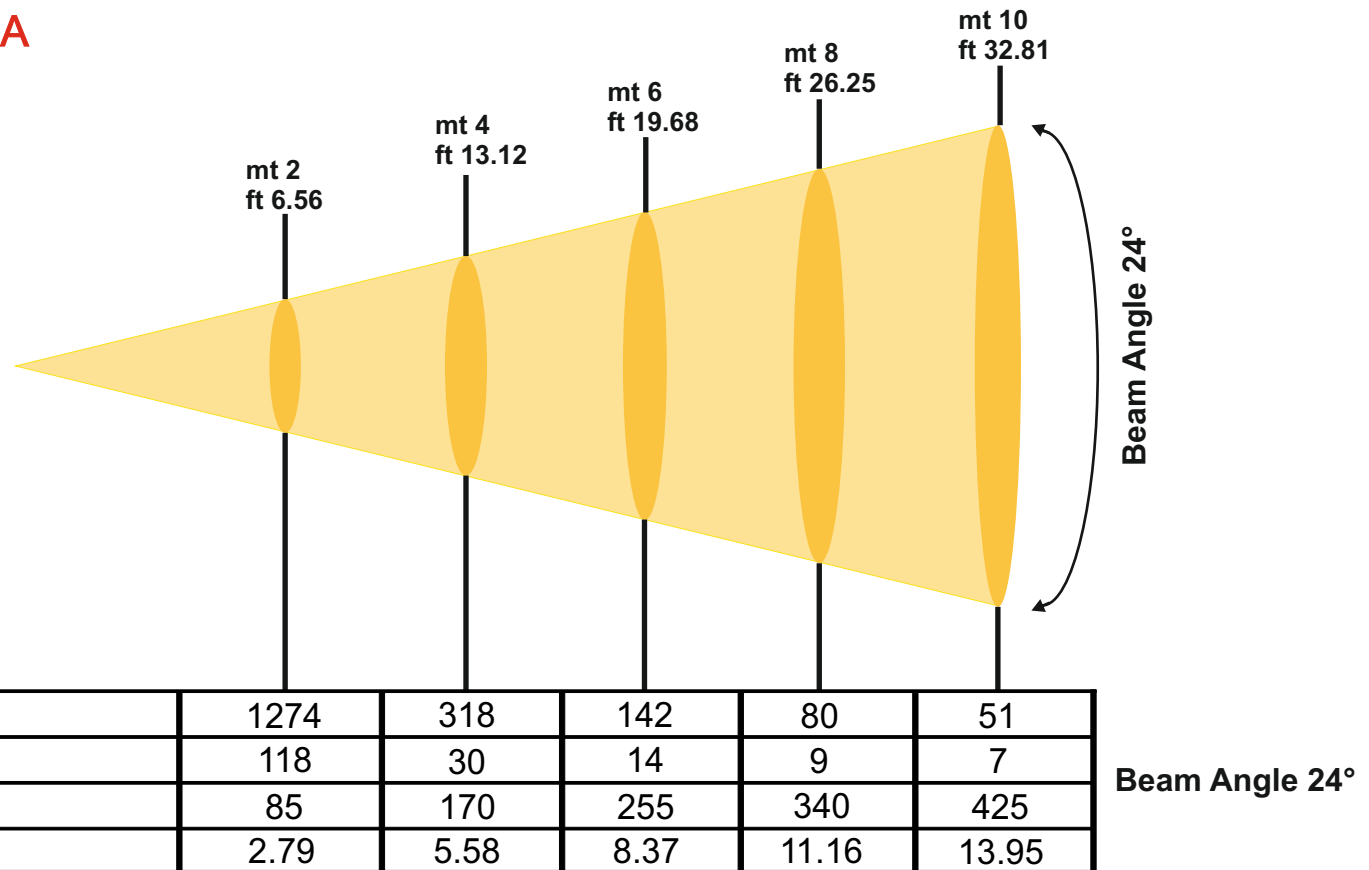



ARTEMIO PROFILE 5000K

Photometric Chart

Optical group WIDE

LED CURRENT 700mA

