

ARTEMIO PROFILE



USER'S MANUAL rel. 1.1 GB

CE

Le informazioni contenute in questo documento sono state attentamente redatte e controllate. Tuttavia non è assunta alcuna responsabilità per eventuali inesattezze. Tutti i diritti sono riservati e questo documento non può essere copiato, fotocopiato, riprodotto per intero o in parte senza previo consenso scritto della D.T.S.

D.T.S. si riserva il diritto di apportare senza preavviso cambiamenti e modifiche estetiche, funzionali o di design a ciascun proprio prodotto. D.T.S. non assume alcuna responsabilità sull'uso o sull'applicazione dei prodotti o dei circuiti descritti.

The information contained in this publication has been carefully prepared and checked. However, no responsibility will be taken for any errors. All rights are reserved and this document cannot be copied, photocopied or reproduced, in part or completely, without prior written consent from D.T.S.

D.T.S. reserves the right to make any aesthetic, functional or design modifications to any of its products without prior notice. D.T.S. assumes no responsibility for the use or application of the products or circuits described herein.

Les informations contenues dans le présent manuel ont été rédigées et contrôlées avec le plus grand soin. Nous déclinons toutefois toute responsabilité en cas d'éventuelles inexactitudes. Tous droits réservés. Ce document ne peut être copié, photocopié ou reproduit, dans sa totalité ou partiellement, sans le consentement préalable de D.T.S.

D.T.S. se réserve le droit d'apporter toutes modifications et améliorations esthétiques, fonctionnelles ou de design, sans préavis, à chacun de ses produits. D.T.S. décline toute responsabilité sur l'utilisation ou sur l'application des produits ou des circuits décrits.

Las informaciones contenidas en este documento han sido cuidadosamente redactadas y controladas. Con todo, no se asume ninguna responsabilidad por eventuales inexactitudes. Todos los derechos han sido reservados y este documento no puede ser copiado, fotocopiado o reproducido, total o parcialmente, sin previa autorización escrita de D.T.S.

D.T.S. se reserva el derecho a aportar sin previo aviso cambios y modificaciones de carácter estético, funcional o de diseño a cada producto suyo. D.T.S. no se asume responsabilidad de ningún tipo sobre la utilización o sobre la aplicación de los productos o de los circuitos descritos.

1- SYMBOLS


Graphic symbols used on this manual:



**THIS SYMBOL MEANS “SUITABLE FOR
INDOOR USE ONLY”**

t_a 40°C

**THIS SYMBOL INDICATES THE MAXIMUM
OPERATING AMBIENT TEMPERATURE**



**THIS SYMBOL MEANS “DO NOT STARE
AT THE OPERATING LIGHT SOURCE”**



Risk Group 2

**THIS SYMBOL INDICATES
PHOTOBIOLOGICAL SAFETY**



**THIS SYMBOL INDICATES THE EUROPEAN
COMMUNITY DIRECTIVE 2012/19/EC ON
WASTE ELECTRICAL AND ELECTRONIC
EQUIPMENT (WEEE)**

2- GENERAL WARNING

Read the instruction contained in this user manual carefully, as they give important information regarding safety during installation, use and maintenance.

The unit is not for household use and must be installed by a qualified electrician or experienced person.

3- GENERAL WARRANTY CONDITIONS

The unit is guaranteed for 36 months from the date of purchase against manufacturing material defects.

4- TECHNICAL FEATURES

DTS Product codes:

03.ART002 ARTEMIO PROFILE 3000K
 03.ART009 ARTEMIO PROFILE 4000K
 03.ART011 ARTEMIO PROFILE 5000K

Optical group codes:

03.ART003 ULTRA-NARROW LENS (8°)
 03.ART013 NARROW LENS (13°)
 03.ART004 NARROW LENS (18°)
 03.ART005 MEDIUM LENS (24°)
 03.ART006 WIDE LENS (33°)

Output

Single high-power White 3000K LED
 1830 Lumens @ 700mA
 CRI > 90
 Also available with 4000K or 5000K LED
 LED lifespan: 50.000 hours (70% lumen output)

Optical group

5 interchangeable lenses for different beam angles:

- Ultra-Narrow (8°)
- Narrow (13°)
- Narrow (18°)
- Medium (24°)
- Wide (33°)

Linear Focus with double optical condenser lens

Gobos

Gobo metal or glass
 Ø external: 24.5 mm (+0 / -0.1 mm)
 Ø of image: 15 mm
 Thickness: max 1.1 mm

Control

On-Off / DMX 512 / RDM / DALI / Art-Net (external driver is required)

Power supply

External PSU:

- DRIVENET 28C DIN @ 48Vdc
- DRIVENET 28 EZ / 416 / 832 PSU (full-range 100-240Vac 50-60 Hz)
- DRIVENET 1664 PSU (range 180-240Vac 50-60 Hz)
- External 36Vdc 700mA max Constant Current PSU

Power consumption: 25W Max

Connections

2 x 0,5 mm² cable (2 m length)

Operating temperature

-10° / 40°C

Physical



IP20

Internal system with four removable shutters

Adjusting yoke

Weight: 1.1 Kg

Finishing: Black

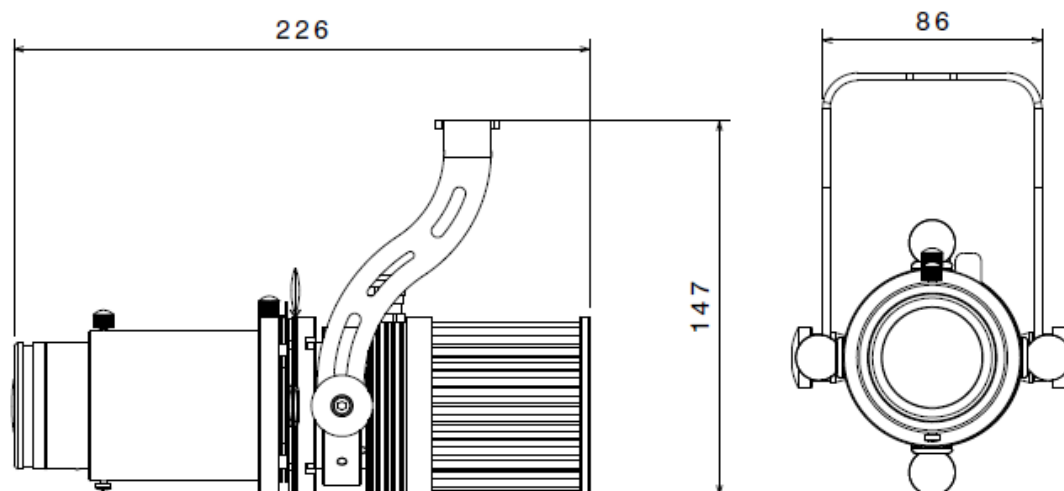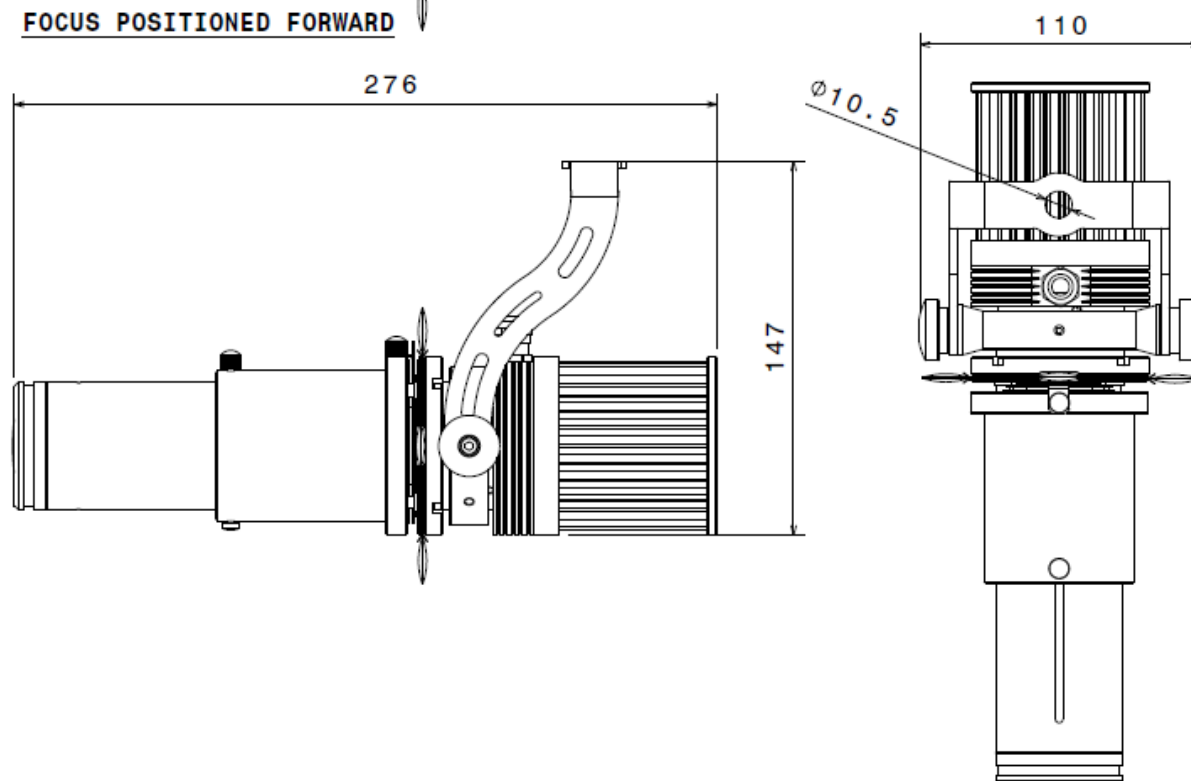Certifications**DIMENSIONS****FOCUS POSITIONED BACKWARD****FOCUS POSITIONED FORWARD**

5- ACCESSORIES

Optional (on request)

- Filter holder - black finishing (code 03.ART015)
- Holographic filter soft-edge (code 0506A132.D19)
- Holographic filter 60°x10° (code 0506A092.D19)
- Gobo holder (code 03.ART007)
- Shutter blade (code 03.ART016)
- 2 x 0,5 mm² cable (code 0509C120)
- Constant current PSU 700mA 9-48Vdc *IP67 (code 0502T031)
- Constant current PSU 500-1400mA 60W *Push Dimming *DALI *230Vac (code 0514M240)
- Constant current PSU 500-1400mA 60W *Push Dimming *DALI *100Vac (code 0514M241)
- “C” Clamp G50 (Max. Load 10 Kg) (code 0521A012)
- Safety cable 3 mm x 60 cm, max capacity load 60 Kg (code 0521A010)

Accessories for Electrified Rail mounting

- Track adapter On-Off - black finishing (code 03.LA.232)
- Track adapter DALI – black finishing (code 03.LA.233)
- Track adapter Dimmer – black finishing (code 03.LA.234)

6- IMPORTANT SAFETY INFORMATION

6.1 Prevention from electric shock:

Class II LED product according to standard EN 60598-1.

6.2 Safety:



Risk Group 2 product according to EN 62471. Risk Group 2

CAUTION. Do not look directly into the light output. May be harmful to the eyes and skin.



Do not stare at the operating light source.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

The unit is not for household use and must be installed by a qualified electrician or experienced person.

LEDs are not replaceable.

The external surface of the unit may exceed 50°C; never handle the unit until at least 5 minutes have elapsed since the unit was turned off.

Never install the unit in an enclosed area lacking sufficient air flow.

Suitable for operation in ambient not exceeding 40°C. t_a 40°C



6.3 Waste Electrical and Electronic equipment (WEEE) directive:

The unit, accessories and packaging should be sorted for environmental-friendly recycling.

For EC countries: according to the European Directive 2012/19/EC for Waste Electrical and Electronic Equipment and its implementation into national right, luminaires that are no longer usable must be collected separately and disposed of in an environmentally correct manner.

7- INSTALLATION

The unit is suitable for dry locations only.


ARTEMIO PROFILE can be installed on a truss or on the ceiling.

It is recommended the use of appropriate clamps to fix the unit to the mounting surface.

ATTENTION:

A safety cable (code 0521A010) must be securely fixed to the unit's mounting bracket and to the support structure of the projector as shown in the picture below.



Fixing clamps and safety cable are available on request.

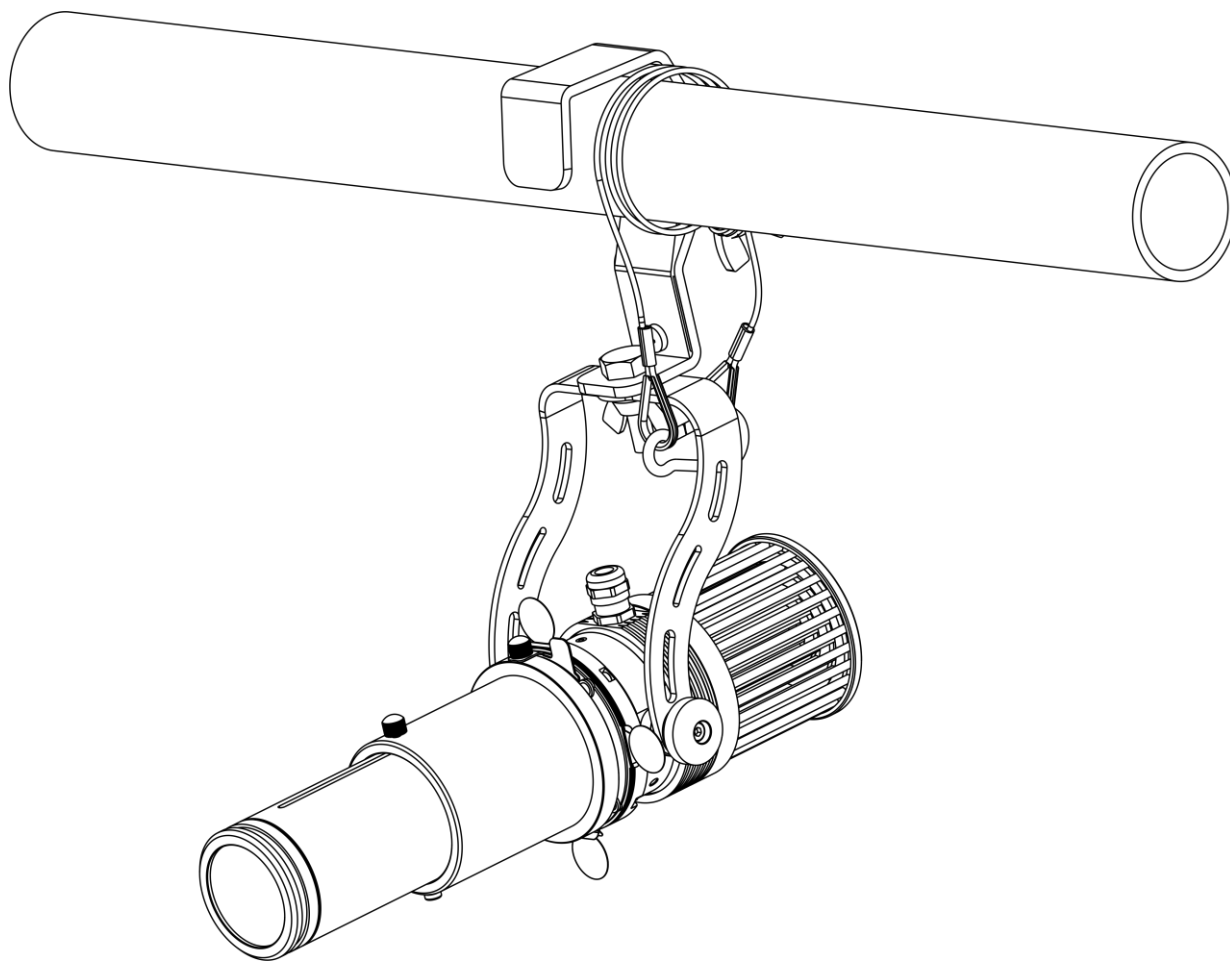

8- OPTICAL GROUP INSTALLATION

5 different interchangeable optics are available for ARTEMIO PROFILE.


- 1) Loose the indicated knob and the mechanical end position screw to remove any optical group already installed.
- 2) Put in place a different optical group by keeping the marked side outward. Fix the optical group by tightening the knob and the screw previously loosen.

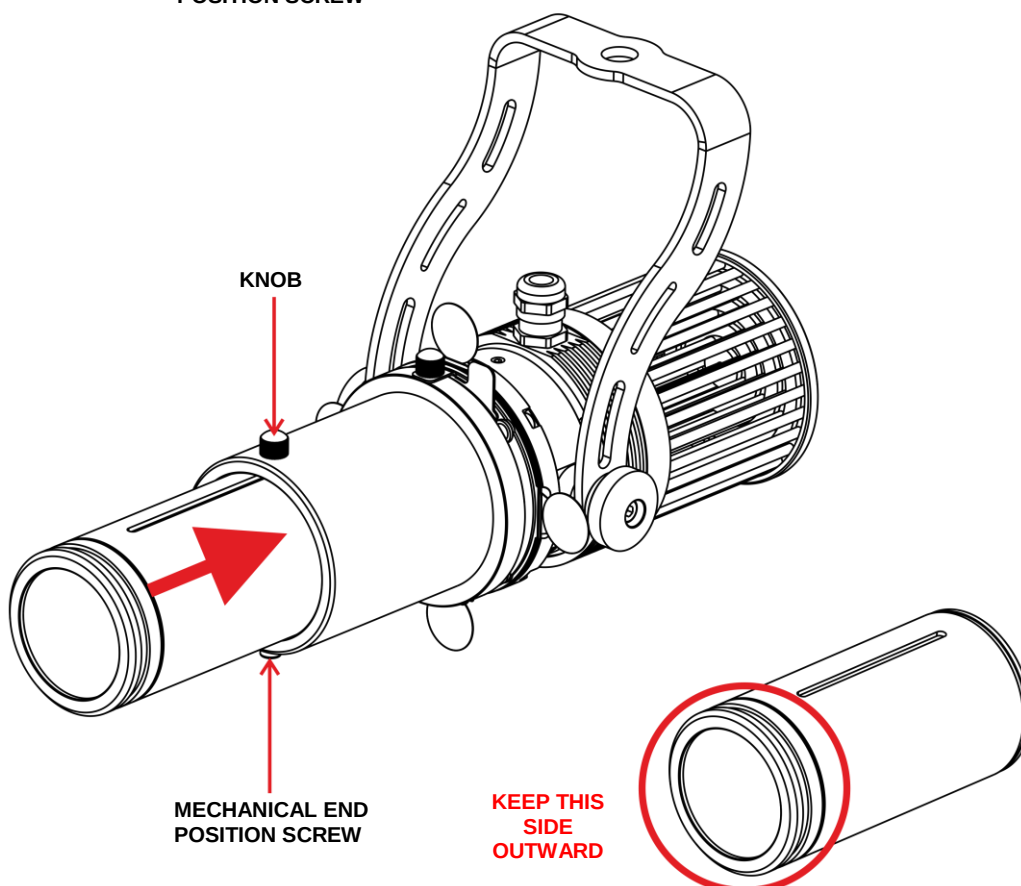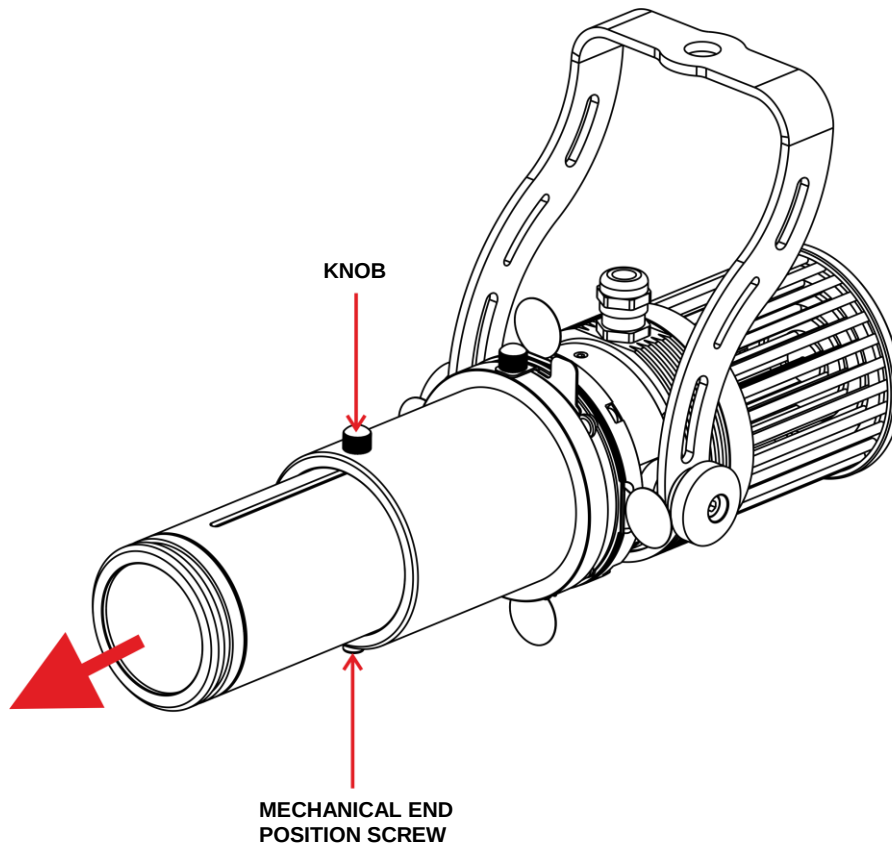

9- FILTER HOLDER INSTALLATION

The Filter Holder for ARTEMIO PROFILE (code 03.ART015) and holographic filters are available on demand.



- 1) To install the holographic filter remove the metal spring from the holder.
- 2) Put in place the holographic filter by keeping the microstructure faces inward.
- 3) Fix the holographic filter with the metal spring.
- 4) Put in place the Filter Holder on ARTEMIO and fix it by tightening the knob.

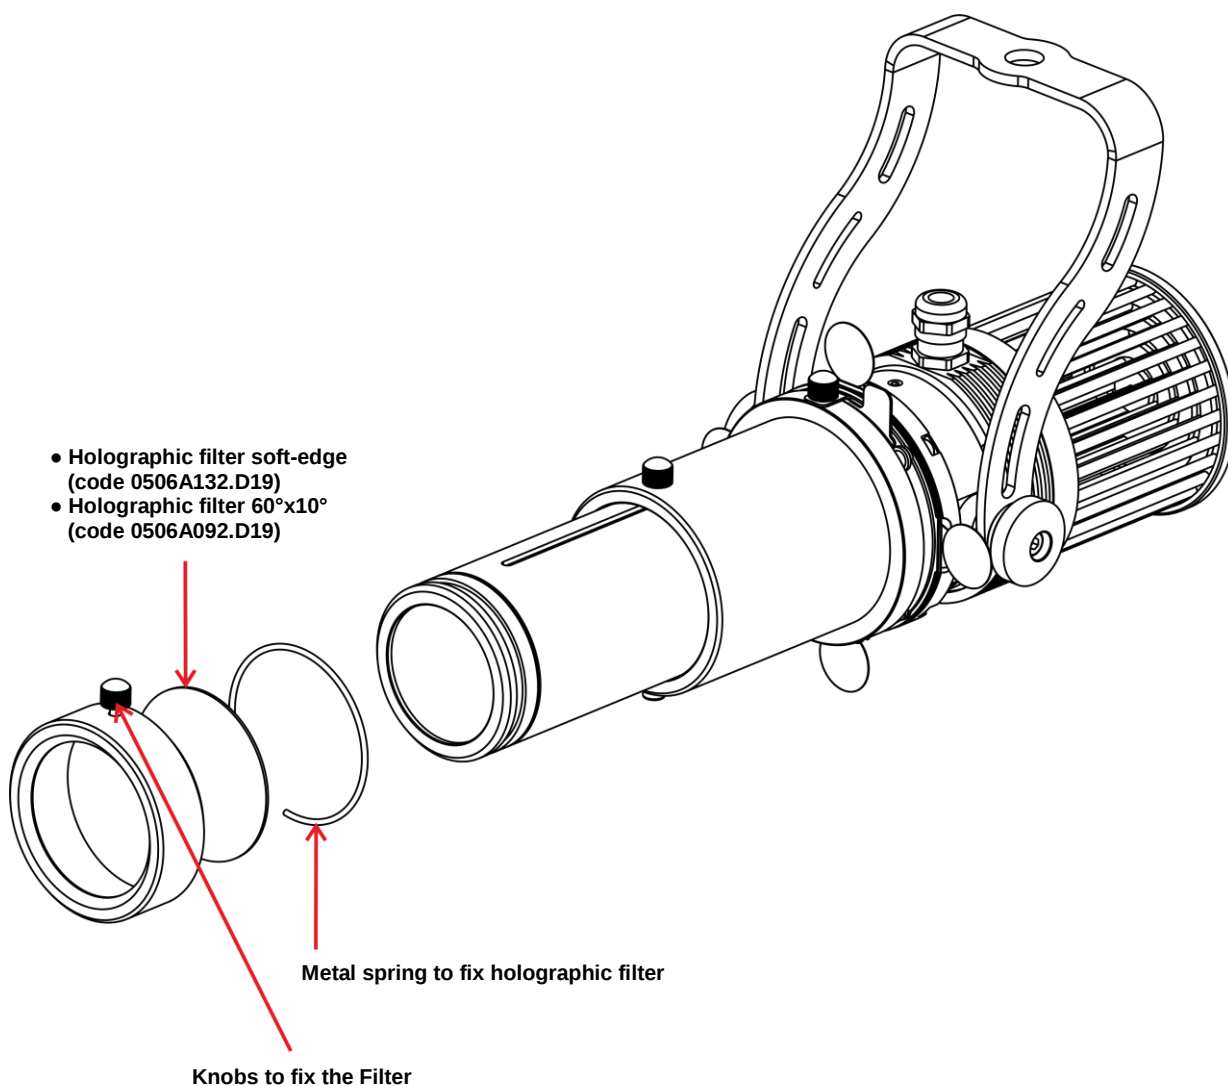

10- GOBO HOLDER INSTALLATION

The Gobo Holder for ARTEMIO PROFILE (code 03.ART007) is available on demand.



- 1) Put in place the Gobo Holder on ARTEMIO as shown in the picture.
- 2) Fix it by tightening the knob.

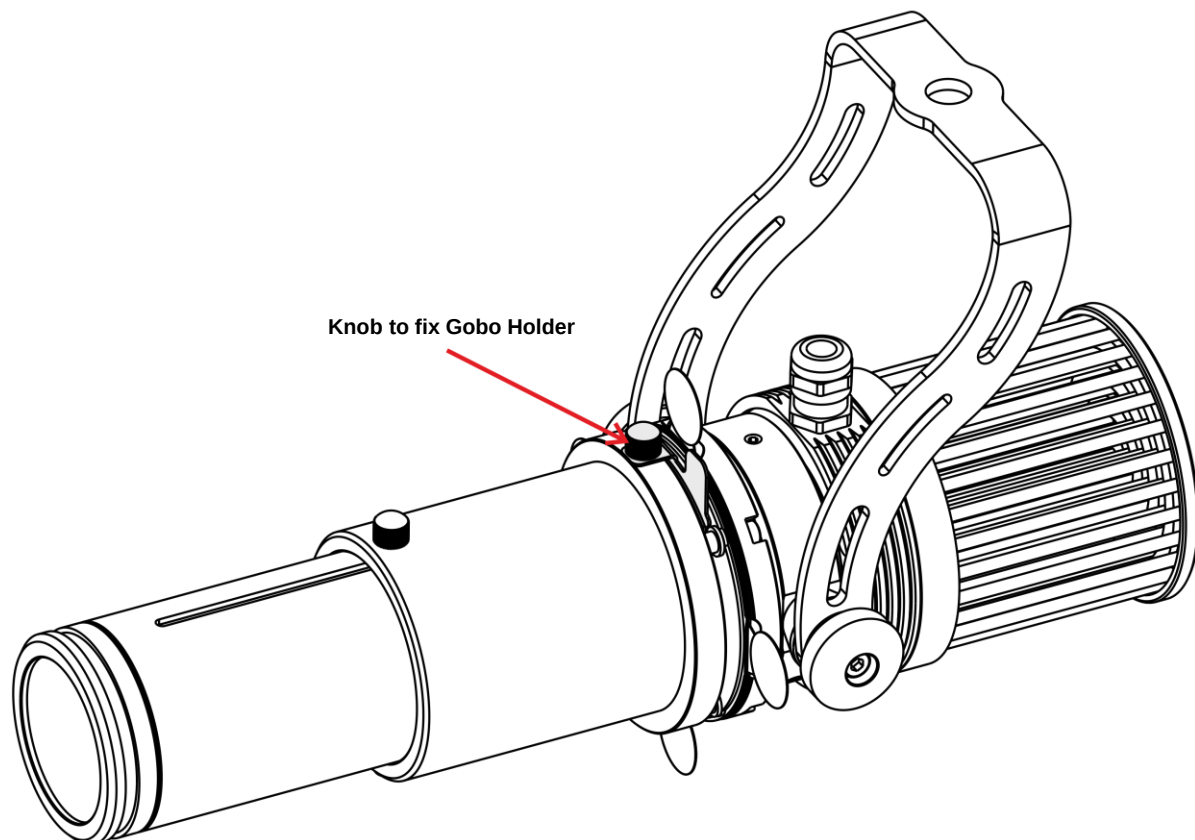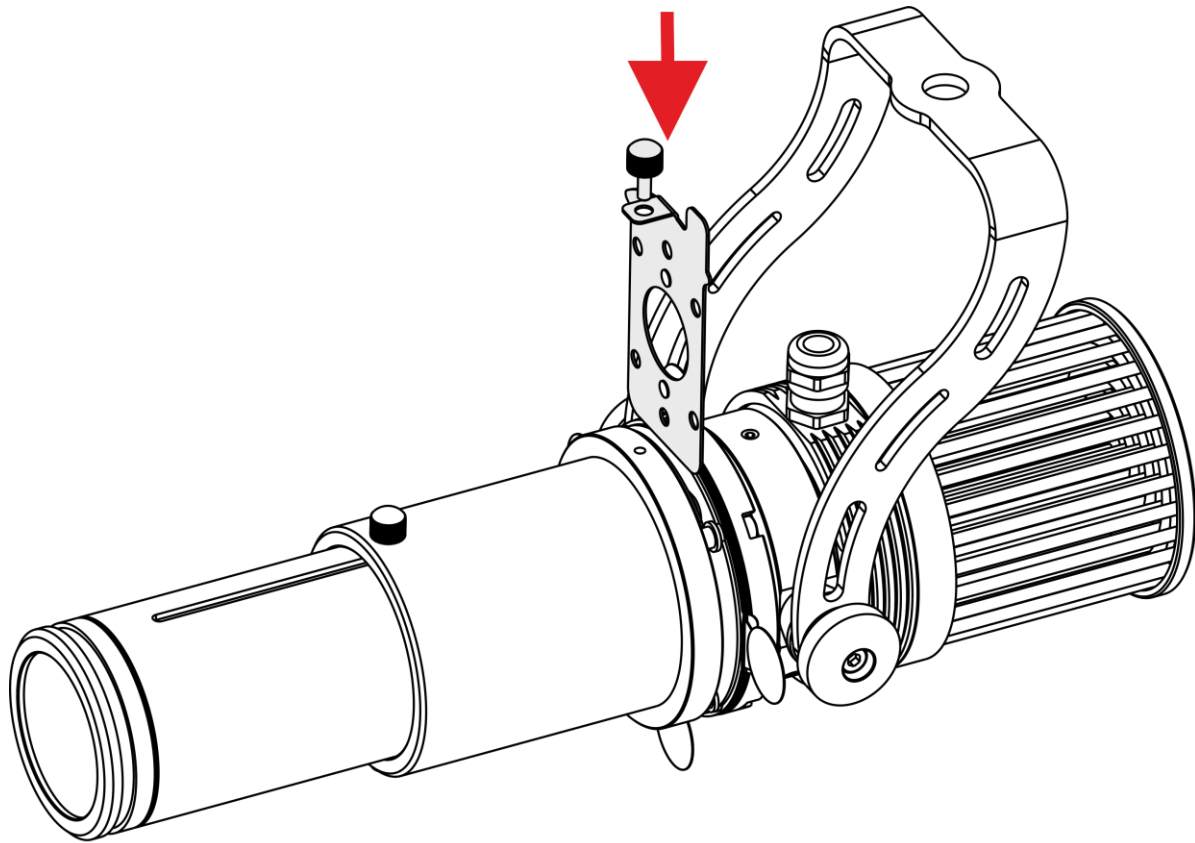

11- GOBO DIMENSIONS


Gobos should be made in either dichroic glass or metal.
Gobo dimensions are as follows:

$\varnothing$ external (ED) = 24.5 mm + 0 / - 0,1 mm
 $\varnothing$ of image (ID) = 15.0 mm
max thickness = 1.1 mm

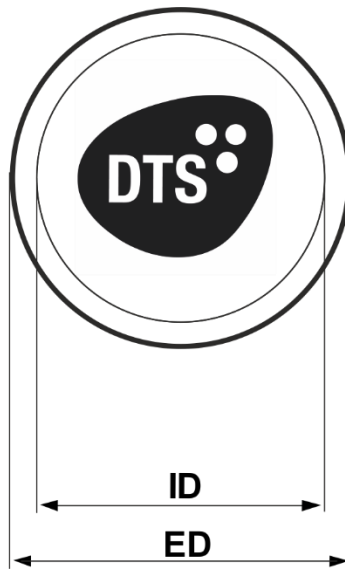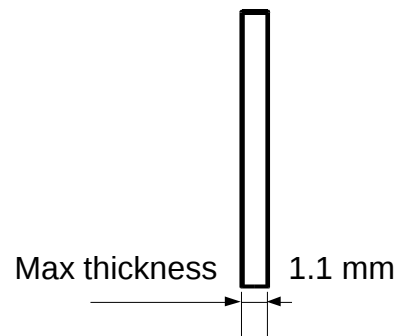


Coated side

When an object is held up the coated side of the glass gobo there is no space between the object and its reflection.




Uncoated side

When an object is held up the uncoated side of the glass gobo there is a space between the object and its reflection.



Load with coated surface towards the light source.

12- ROTATING SYSTEM

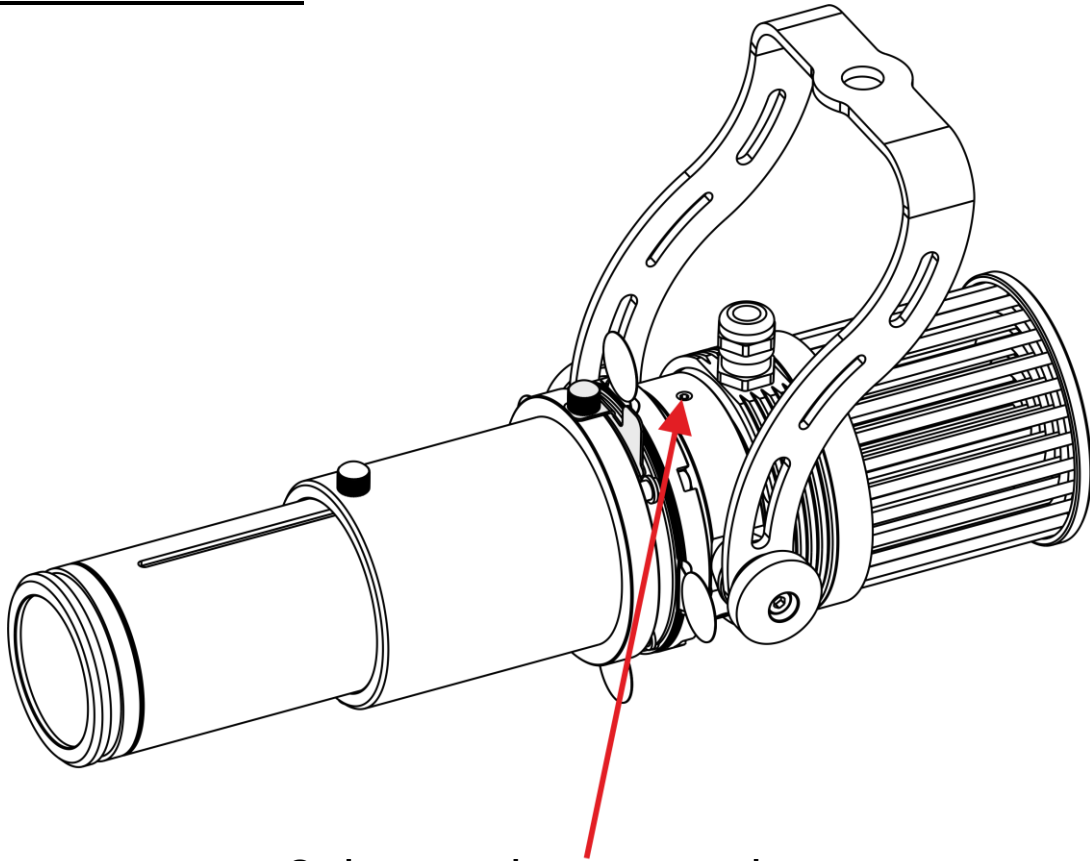

Grub screw to loose to rotate the system

PROJECTION WITH GOBOS:

Left system rotation



0° system rotation




Right system rotation



PROJECTION WITH SHUTTER BLADES:


Left system rotation



0° system rotation




Right system rotation



13- CONNECTIONS


ARTEMIO PROFILE is provided with 2 x 0,5 mm² cable (2 m length).

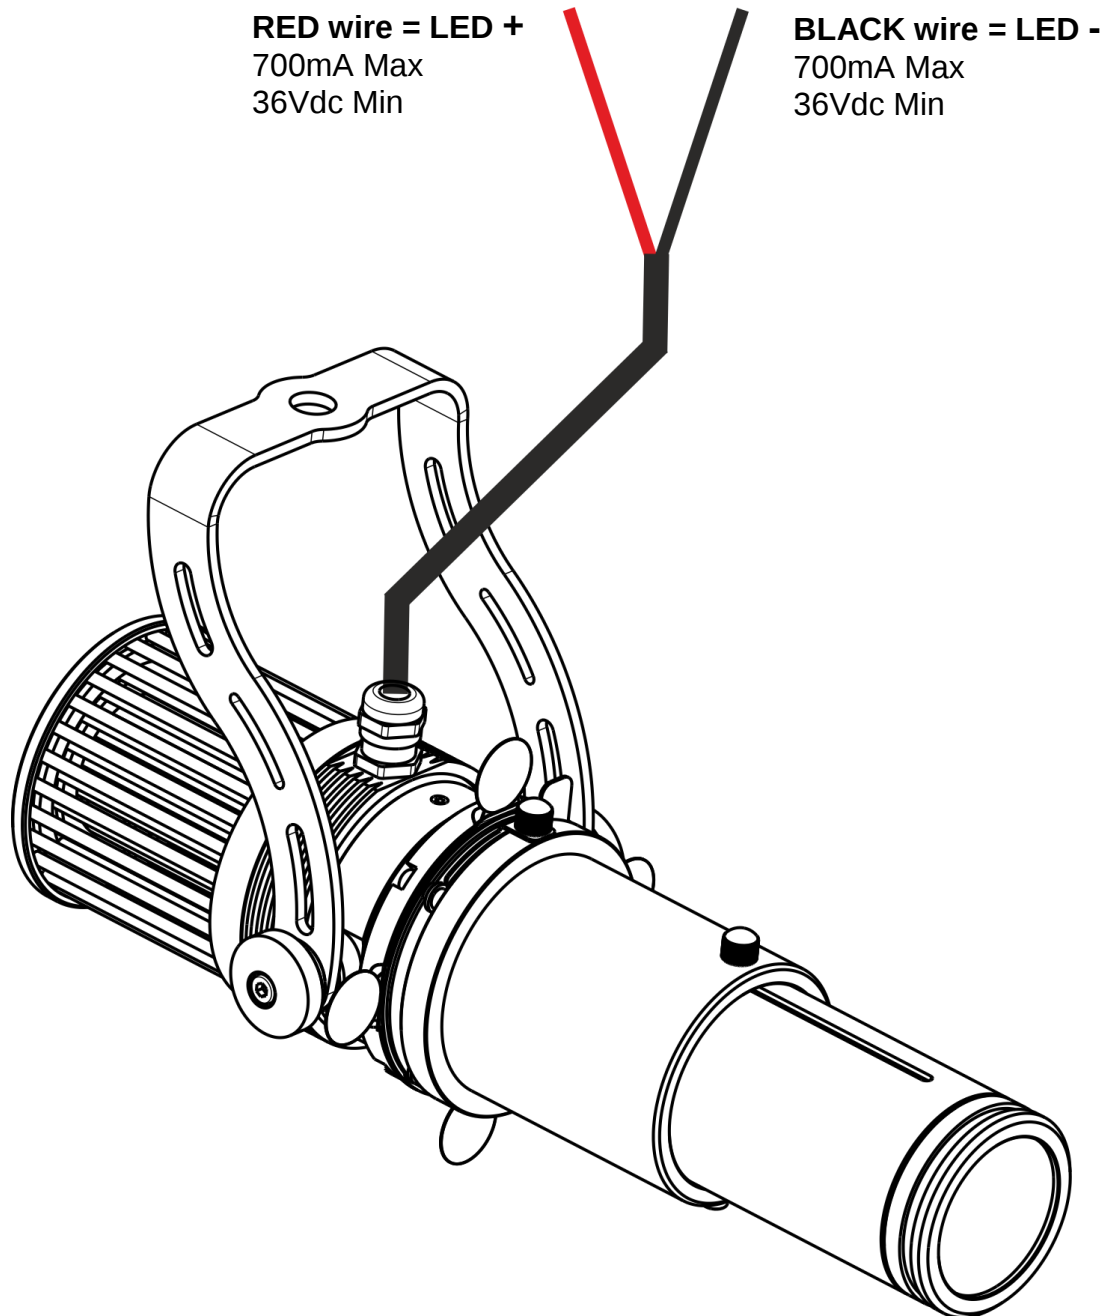

14- WIRING DIAGRAMS

The maximum number of ARTEMIO PROFILE connectable to each output channel of the DRIVENET 28 EZ is 1 piece.


The maximum distance between DRIVENET 28 EZ and ARTEMIO PROFILE unit should not exceed 100 meters.

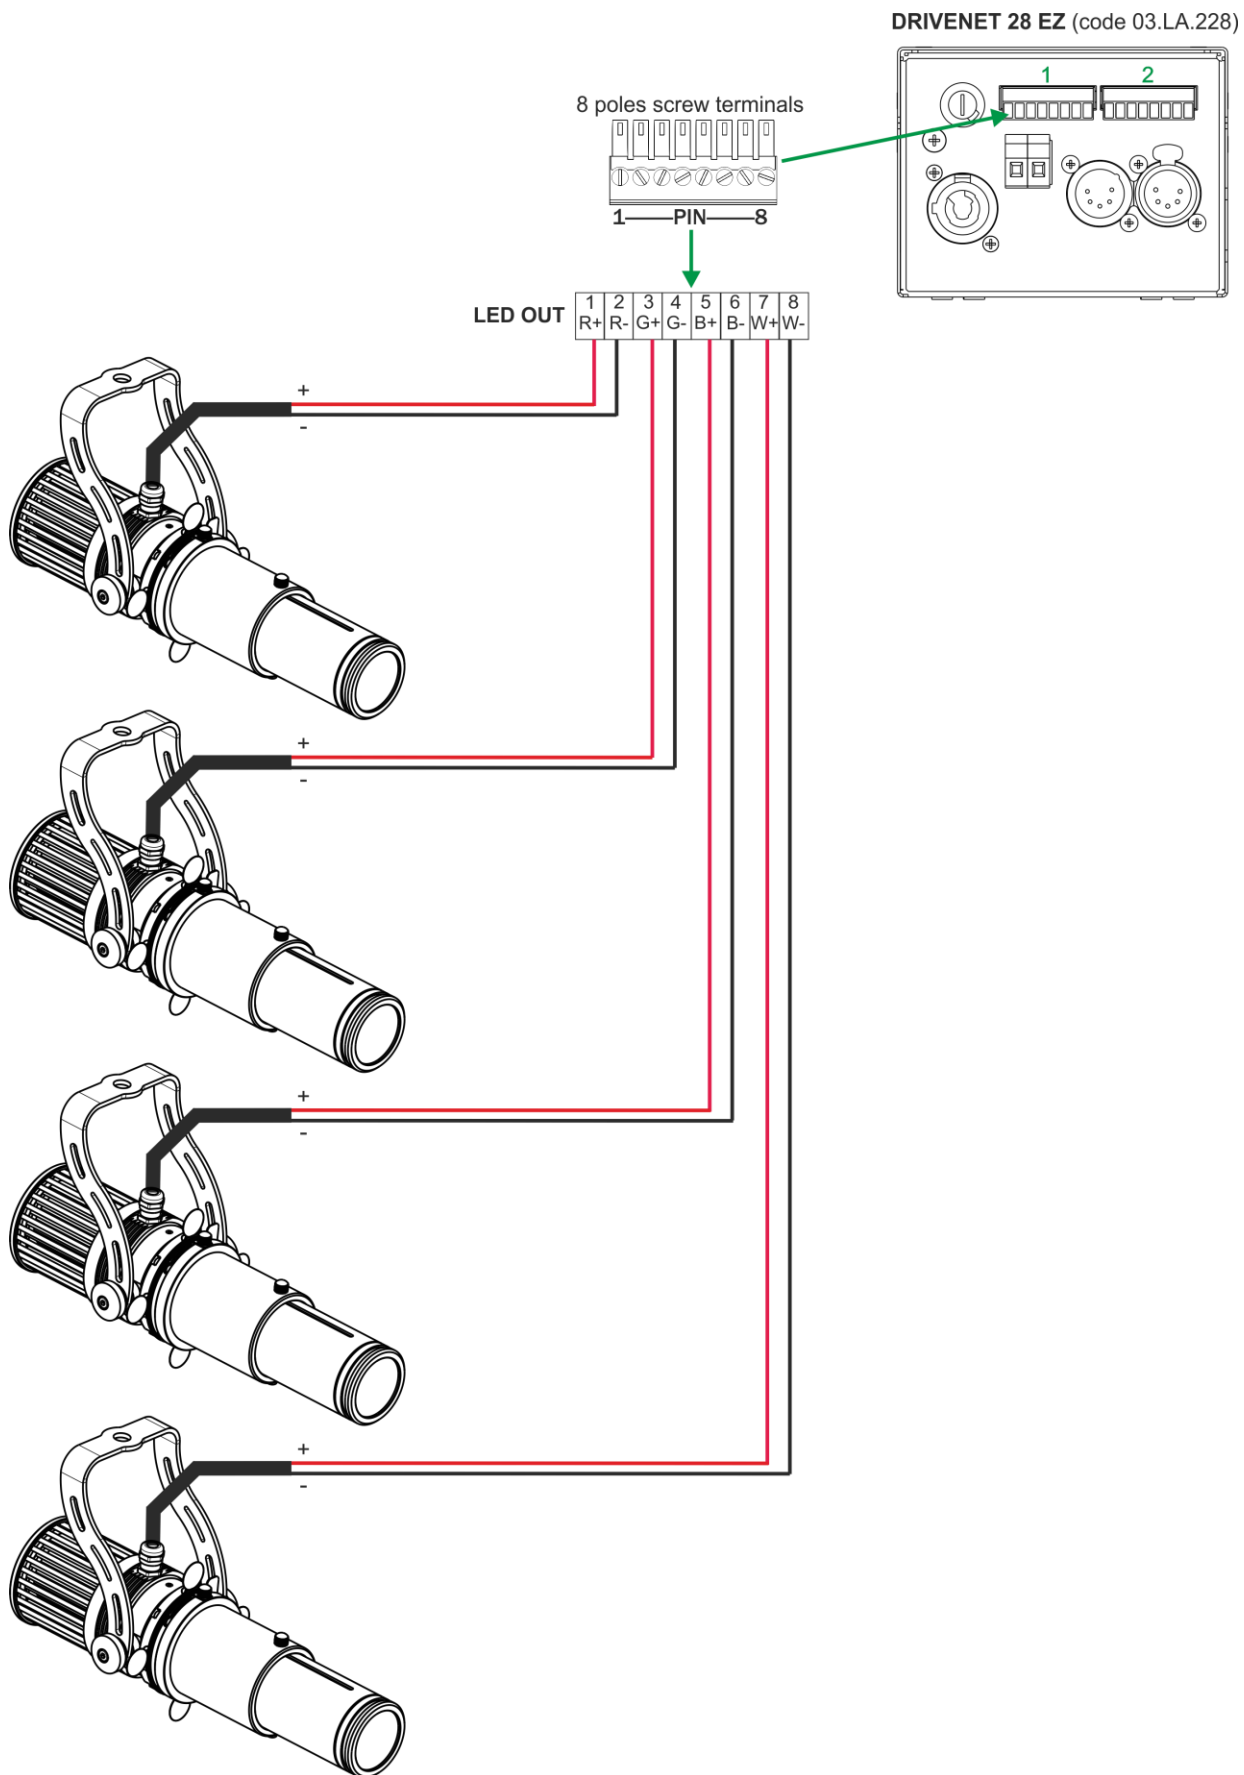

14- WIRING DIAGRAMS

The maximum number of ARTEMIO PROFILE connectable to each output channel of the DRIVENET 832 is 1 piece.


The maximum distance between DRIVENET 832 and ARTEMIO PROFILE unit should not exceed 100 meters.

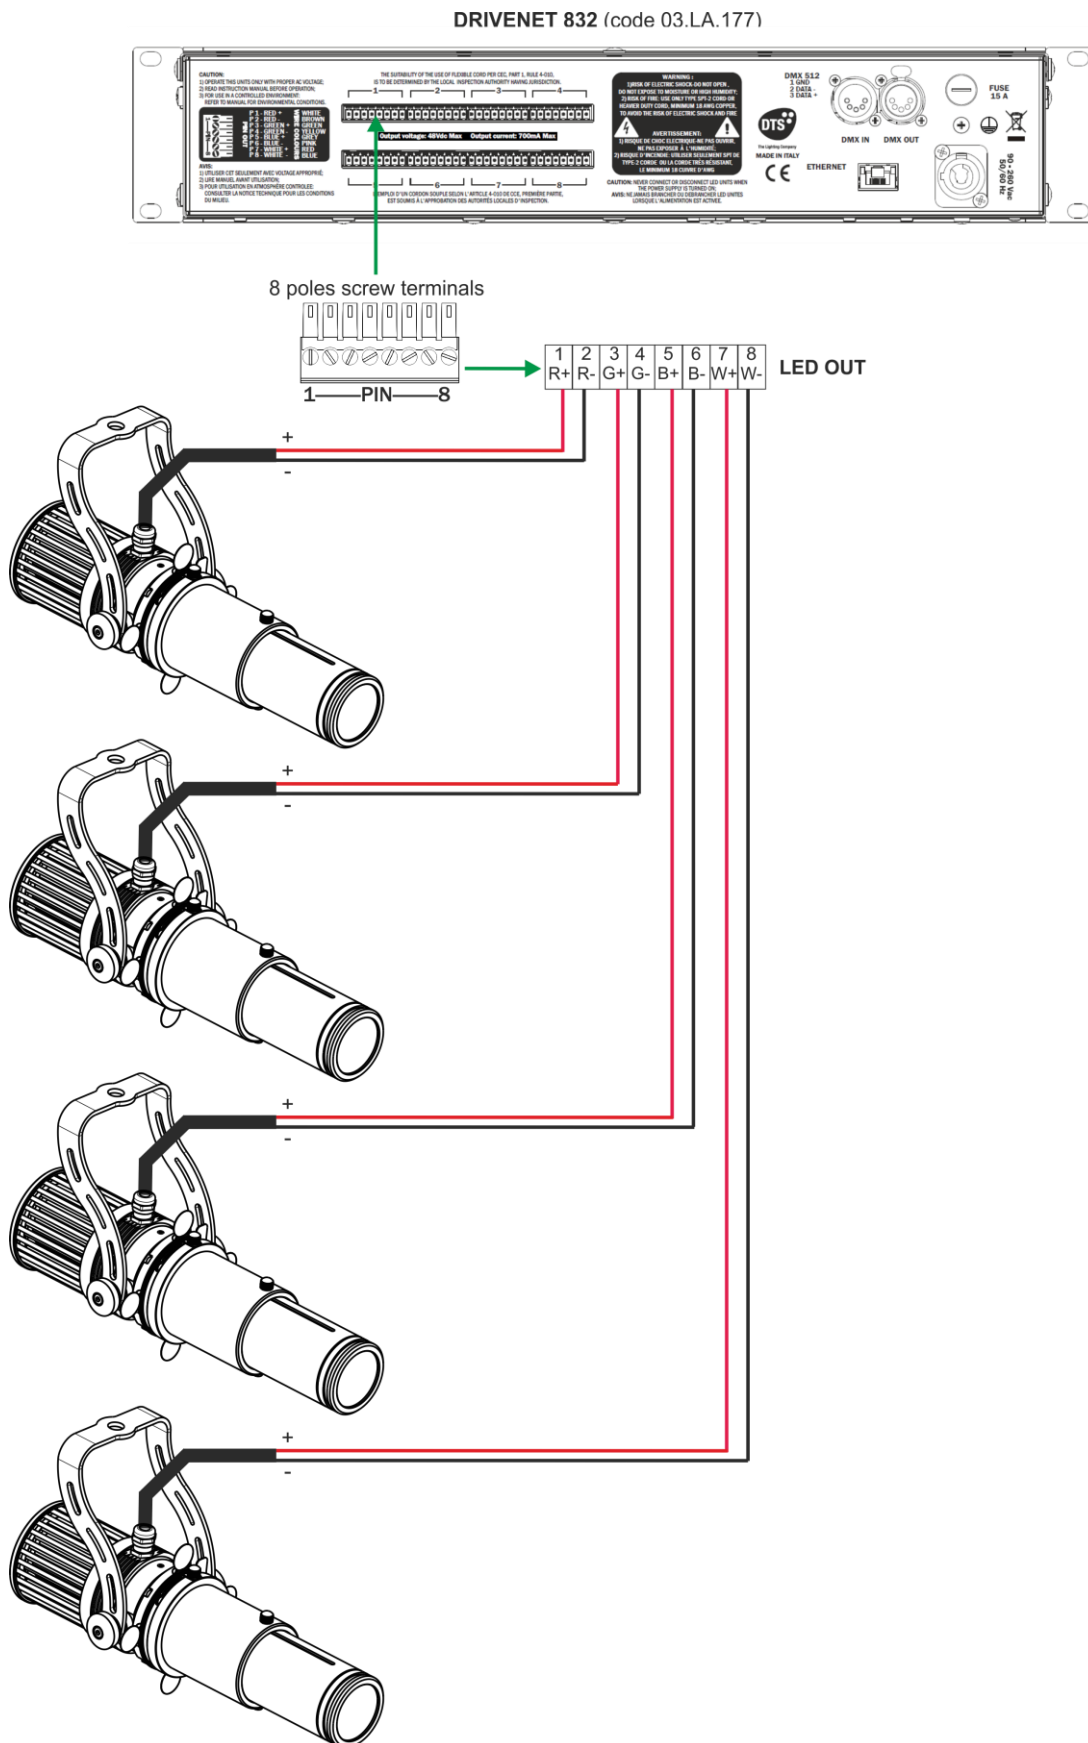

14- WIRING DIAGRAMS

The maximum number of ARTEMIO FRESNEL connectable to each output channel of the DRIVENET 28C DIN @ 48Vdc is 1 piece.

The maximum distance between DRIVENET 28C DIN @ 48Vdc and ARTEMIO FRESNEL unit should not exceed 100 meters.

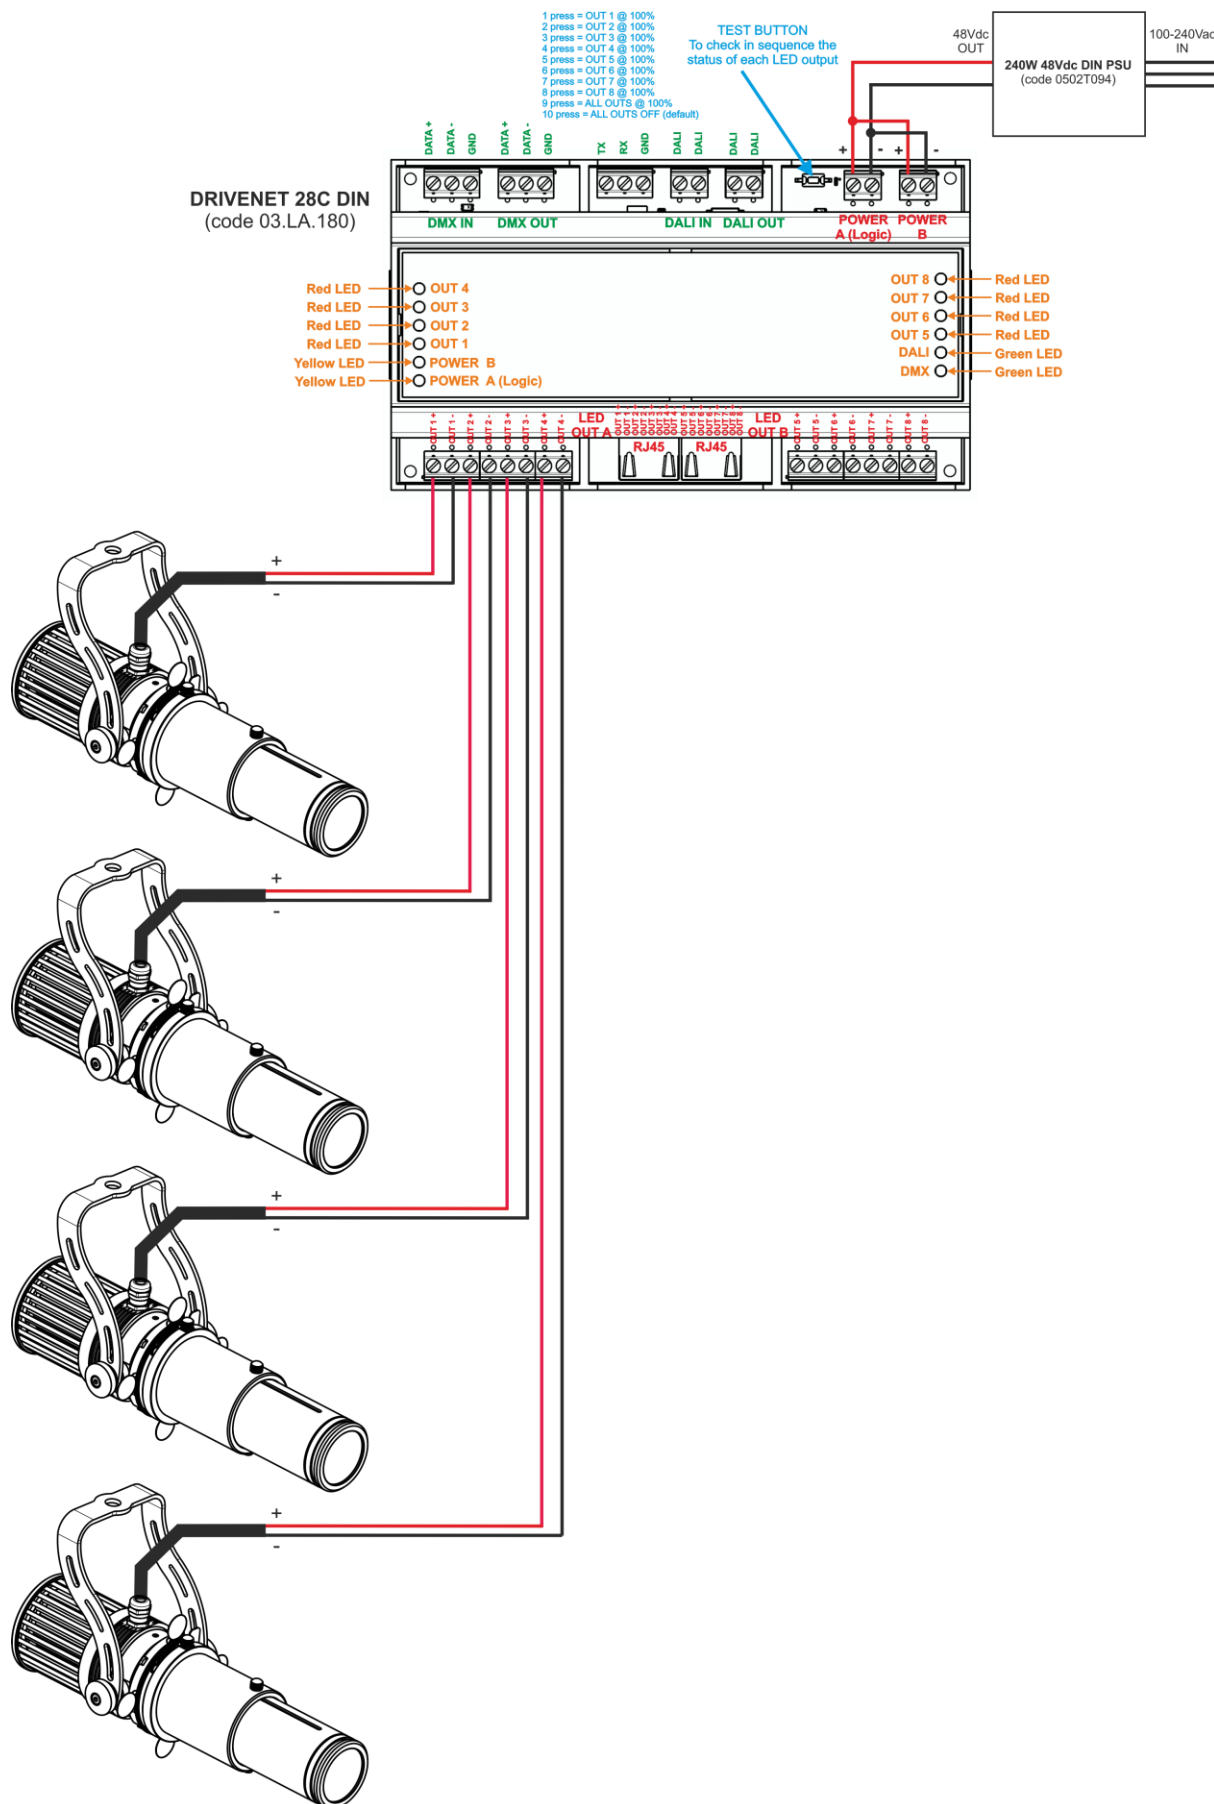

NOTES

NOTES

NOTES

ISO 9001:2015

DTS quality system is
certified to the ISO
9001:2015 standard



05171344



**MADE IN
ITALY**

D.T.S. Illuminazione s.r.l.

Via Fagnano Selve 12- • 47843 Misano Adriatico (RN) Italy
Tel.: +39 0541 611131 • Fax +39 0541 611111 info@dts-lighting.it

www.dts-lighting.it