


DONUT 18



FEATURES



CERTIFICATIONS



TREATMENTS

FINITURE

BRONZE AND STEEL

LED


FULL COLOR (RGBW)*	F
HQS (RGBA)	FY

LENS

UN - 8°	08
MF - 27°	25

DONUT 18


03.DN002.



*RGBW version not available for France



TECHNICAL

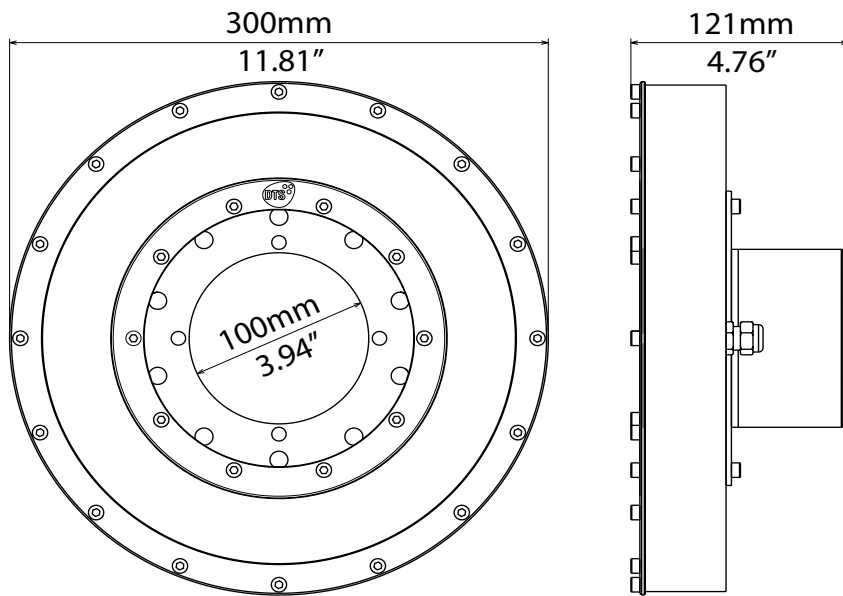

ACCESSORIES ON REQUEST



0509C123 • 8-pole underwater cable 8 x 0.25 mm²

OUTPUT	• 18 x 4-colors LEDs
	• Lumens output (RGBW): 7,050 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	<ul style="list-style-type: none"> • Ultra Narrow flood 8° • Medium flood 27°
POWER SUPPLY	<ul style="list-style-type: none"> • External CC PSU Led driver 48Vdc 700mA max per channel • Max distance between Drivenet PSU and fixture 100 m • Consumption: max 180 W @ 700mA
CONNECTIONS	• 2 x 5 m end-stripped 8-pole cables (Pay Attention: for specific lengths needs, please request to the sales manager at the time of ordering)
PHYSICAL	• Housing: Bronze / Stainless Steel
	• Weight: 12.4 Kg (27.3 lbs)
ACCESSORIES INCLUDED	• 2 x Bracket for cables protection (code 00M11505)

CONNECTIONS CHART

DRIVENET 28C DIN @48Vdc	DRIVENET 28 EZ	DRIVENET 416	DRIVENET 832	DRIVENET 1664
Max 1 (1 item per 2 outputs)	Max 1 (1 item per 2 outputs)	Max 2 (1 item per 2 outputs)	Max 4 (1 item per 2 outputs)	Max 8 (1 item per 2 outputs)

! Caution: Do not turn on the fixture in the absence of water



PHOTOMETRIC DATA DONUT 18 - FULL COLOR (RGBW)

MEDIUM 27° lenses

	mt 5 ft 16.40	mt 10 ft 32.81	mt 15 ft 49.21	mt 20 ft 65.62	mt 25 ft 82.02	
FULL	1066	267	118	67	43	lux center (lx)
RGBW	99	25	11	6	4	foot candles (fc)
BEAM	240	480	720	960	1200	diameter (cm)
ANGLE	7.88	15.75	23.63	31.51	39.38	diameter (ft)

