


FOCUS 1 POWER WH

EX FOCUS POWER



FEATURES



CERTIFICATIONS



TREATMENTS

FINITURE

<input type="checkbox"/>	SILVER - RAL 9006	21

LED


	WHITE 3000 K	WB

LENS


	MF - 21°	21
	WF - 45°	20

FOCUS 1 POWER WH

03.LCB004E



TECHNICAL

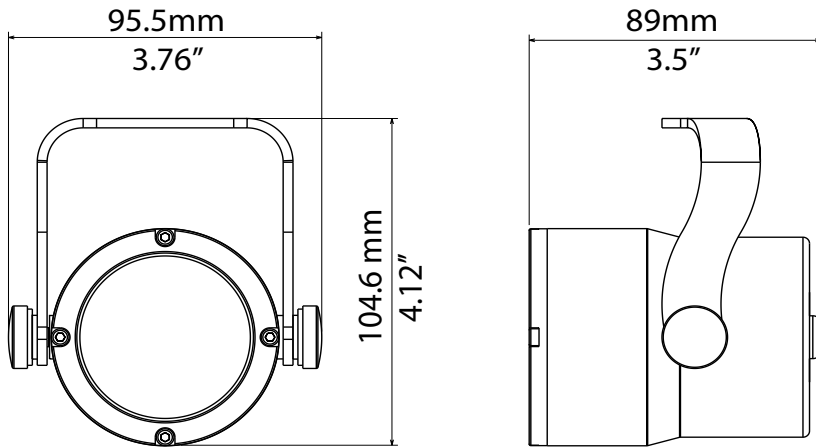

OUTPUT	• 1 x White LED
	• CRI >90
	• Lumen output (3000 K): 850 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	• Medium flood 21°
	• Wide flood 45°
POWER SUPPLY	• External CC PSU LED driver 700mA max per channel
	• Max distance between Drivenet PSU and fixture 100 m
CONNECTIONS	• Consumption: max 10 W @ 700mA
	• 90 cm end-stripped 2-pole cable
PHYSICAL	• Housing: Aluminium
	• Weight: 0.9 Kg (1.98 lbs)

ACCESSORIES ON REQUEST



Max. 3 units serial wired
0502T031 • Constant current PSU 700mA
 9÷48Vdc



Max 6 units serial wired @ 700mA
0514M240 • Constant current PSU
 500-1400mA 60W *Push Dimming *DALI
 *230Vac



0514M241 • Constant current PSU
 500-1400mA 60W *Push Dimming *DALI
 *100Vac



0509C081 • 2-pole underwater cable 2 x
 0.75 mm²



0521A010 • Safety cable - 3 x 600 mm -
 max. capacity load 30 Kg (66 lbs)

CONNECTIONS CHART

DRIVENET 28C DIN @48Vdc	DRIVENET 28 EZ	DRIVENET 416	DRIVENET 832	DRIVENET 1664
Max 24 (12 items per output)	Max 24 (12 items per output)	Max 48 (12 items per output)	Max 96 (12 items per output)	Max 192 (12 items per output)

