


FOCUS 1

EX MINIFOCUS



FEATURES



LED



IP65



remote PSU



-10° +40°

CERTIFICATIONS



TREATMENTS

FINITURE

<input type="checkbox"/> SILVER - RAL 9006	21

LED


<input type="checkbox"/> FULL COLOR (RGBW)	FC

LENS


<input type="checkbox"/> MF - 22°	25
<input type="checkbox"/> WF - 28°	40

FOCUS 1

03.LCB005E



TECHNICAL

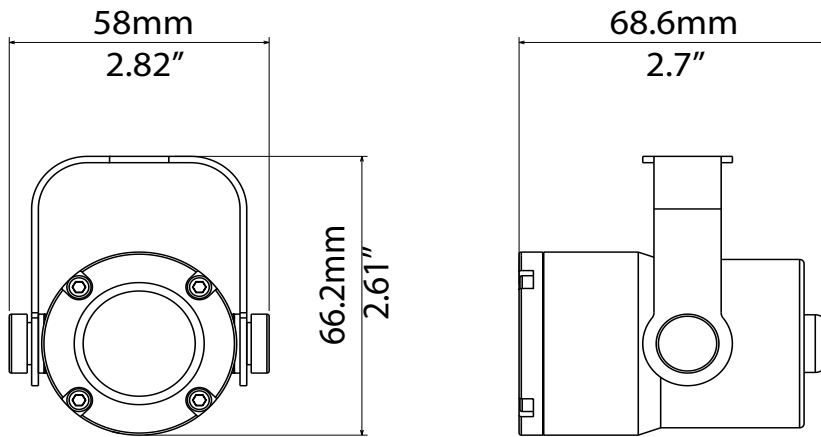

OUTPUT	• 1 x 4-colors LED
	• Lumens output (RGBW): 420 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	• Medium flood 22°
	• Wide flood 28°
POWER SUPPLY	• External CC PSU LED driver 700mA max per channel
	• Max distance between Drivenet PSU and fixture 100 m
CONNECTIONS	• Consumption: max 10 W @ 700mA
	• 90 cm end-stripped 8-pole cable
PHYSICAL	• Housing: Aluminium
	• Weight: 0.34 Kg (0.6 lbs)

ACCESSORIES ON REQUEST



03.LA.131.IP56 • HUB-IP56 Screw terminals 1 IN / 3 OUT



03.LA.131 • HUB-IP20 Screw terminals 1 IN / 3 OUT



0521A010 • Safety cable - 0.3x60 cm - max. capacity load 60 Kg



0509C062.PUR • 8-pole outdoor cable


CONNECTIONS CHART

DRIVENET 28C DIN @48Vdc	DRIVENET 28 EZ	DRIVENET 416	DRIVENET 832	DRIVENET 1664
Max 24 (12 items per output)	Max 24 (12 items per output)	Max 48 (12 items per output)	Max 96 (12 items per output)	Max 192 (12 items per output)

PHOTOMETRIC DATA FOCUS 1 - FULL COLOR (RGBW) - @ 700mA

MEDIUM 22° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
FULL	5253	1313	584	328	210	lux center (lx)
RGBW	488	122	54	31	20	foot candles (fc)
BEAM	39	78	117	156	194	diameter (cm)
ANGLE	1.28	2.55	3.83	5.10	6.38	diameter (ft)

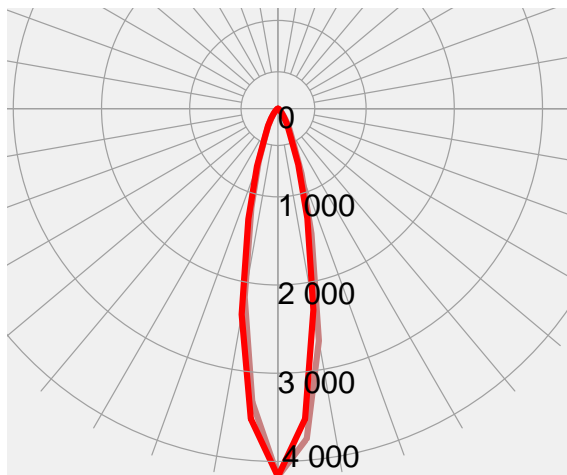

WIDE 28° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
FULL	3567	892	396	223	143	lux center (lx)
RGBW	332	83	37	21	13	foot candles (fc)
BEAM	50	100	150	199	249	diameter (cm)
ANGLE	1.64	3.27	4.91	6.54	8.18	diameter (ft)

