

FOCUS 3

EX FOCUS



FEATURES



CERTIFICATIONS



TREATMENTS

FINITURE

<input type="checkbox"/> SILVER - RAL 9006	21

LED


FULL COLOR (RGBW)	FC
HQS (RGBA)	FY

LENS


MF - 22°	25
WF - 28°	40

FOCUS 3

03.LCB001E



TECHNICAL

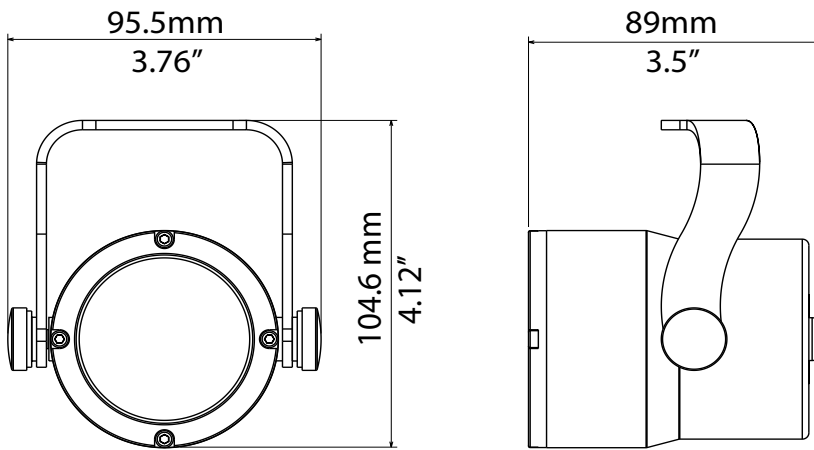

OUTPUT	• 3 x 4-colors LEDs
	• Lumens output (RGBW): 1,288 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	• Medium flood 22°
	• Wide flood 28°
POWER SUPPLY	• External CC PSU LED driver 700mA max per channel
	• Max distance between Drivenet PSU and fixture 100 m
CONNECTIONS	• Consumption: max 30 W @ 700mA
	• 90 cm end-stripped 8-pole cable
PHYSICAL	• Housing: Aluminium
	• Weight: 0.6 Kg (1.33 lbs)

CONNECTIONS CHART

DRIVENET 28C DIN @48Vdc	DRIVENET 28 EZ	DRIVENET 416	DRIVENET 832	DRIVENET 1664
Max 8 (4 items per output)	Max 8 (4 items per output)	Max 16 (4 items per output)	Max 32 (4 items per output)	Max 64 (4 items per output)

ACCESSORIES ON REQUEST



03.LA.131.IP56 • HUB-IP56 Screw terminals 1 IN / 3 OUT



03.LA.131 • HUB-IP20 Screw terminals 1 IN / 3 OUT



03.LA.127.04 • Top Hat - grey glitter finishing
Max lenght 7 cm (2.8")



0509C062.PUR • 8-pole outdoor cable




0521A010 • Safety cable - 0.3x60 cm - max. capacity load 60 Kg

PHOTOMETRIC DATA FOCUS 3 - FULL COLOR (RGBW)

MEDIUM 22° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
FULL	5253	1313	584	328	210	lux center (lx)
RGBW	588	122	54	31	20	foot candles (fc)
BEAM ANGLE	39	78	117	156	194	diameter (cm)
	1.28	2.55	3.83	5.10	6.38	diameter (ft)

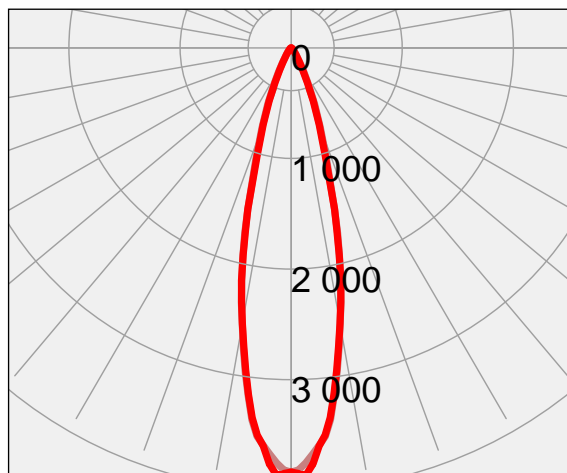

WIDE 28° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
FULL	3567	892	396	223	143	lux center (lx)
RGBW	332	83	37	21	13	foot candles (fc)
BEAM ANGLE	50	100	150	199	249	diameter (cm)
	1.64	3.27	4.91	6.54	8.18	diameter (ft)

