



# FOCUS 6

EX EOS 6



## FEATURES



## CERTIFICATIONS



## TREATMENTS

## FINITURE

<input type="checkbox"/> SILVER - RAL 9006	21

## LED


FULL COLOR (RGBW)	FC
HQS (RGBA)	FY

## LENS


SP - 10°	10
MF - 22°	25
WF - 40°	40

FOCUS 6

03.E0B001E



## TECHNICAL

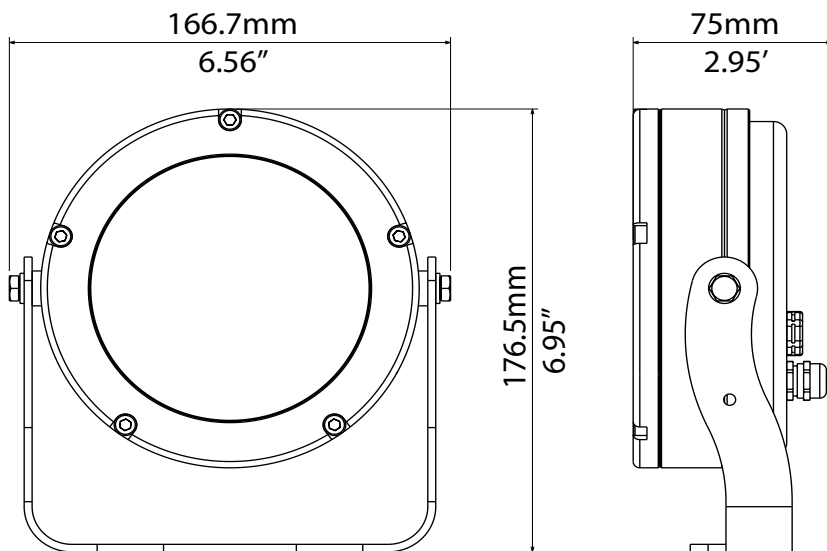

<b>OUTPUT</b>	• 6 x 4-colors LEDs
	• Lumens output (RGBW): 2,660 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
<b>OPTICAL GROUP</b>	• Narrow flood 10°
	• Medium flood 22°
	• Wide flood 40°
<b>POWER SUPPLY</b>	• External CC PSU LED driver 700mA max per channel
	• Max distance between Drivenet PSU and fixture 100 m
<b>CONNECTIONS</b>	• Consumption: msc 60 W @ 700mA
	• 90 cm cable with M12 male connector
<b>PHYSICAL</b>	• Housing: Aluminium
	• Weight: 2.2 Kg (4.85 lbs)

## ACCESSORIES ON REQUEST



**03.LA.131.IP56** • HUB-IP56 Screw terminals 1 IN / 3 OUT



**03.LA.131** • HUB-IP20 Screw terminals 1 IN / 3 OUT



**03.LA.151.04** • Top Hat - grey glitter finishing  
Max length 10 cm (3.9")



Outdoor extension cable M12 Female + end stripped 8-pole  
**02K001157.10** • length 10 mt - 33 ft  
**02K001157.30** • length 30 mt - 98 ft  
**02K001157.50** • length 50 mt - 164 ft  
**02K001157.100** • length 100 mt - 328 ft



Outdoor extension cable with M12 M/F 8 pins - cable Ø 6 mm  
**03.LA.035.10** • length 10 mt - 33 ft  
**03.LA.035.20** • length 20 mt - 66 ft  
**03.LA.035.30** • length 30 mt - 98 ft  
**03.LA.035.40** • length 40 mt - 132 ft  
**03.LA.035.50** • length 50 mt - 164 ft



**03.LA.037** • Y-BOX IP65 M12



**0521A010** • Safety cable - 0.3x60 cm - max. capacity load 60 Kg

## CONNECTIONS CHART


DRIVENET 28C DIN @48Vdc	DRIVENET 28 EZ	DRIVENET 416	DRIVENET 832	DRIVENET 1664
Max 4 (2 items per output)	Max 4 (2 items per output)	Max 8 (2 items per output)	Max 16 (2 items per output)	Max 32 (2 items per output)



# PHOTOMETRIC DATA FOCUS 6 - FULL COLOR (RGBW)


SPOT 10° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
<b>FULL RGBW</b>	29578	7395	3286	1849	1183	lux center (lx)
	2749	687	305	172	110	foot candles (fc)
<b>BEAM ANGLE</b>	17	35	52	70	87	diameter (cm)
	0.57	1.15	1.72	2.30	2.87	diameter (ft)

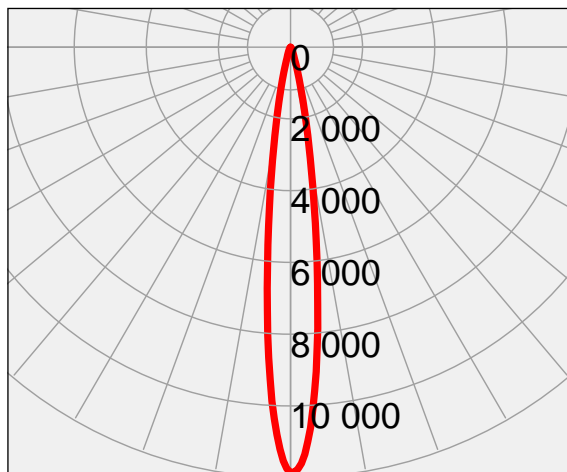

MEDIUM 22° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
<b>FULL RGBW</b>	7455	1864	828	466	298	lux center (lx)
	693	173	77	43	28	foot candles (fc)
<b>BEAM ANGLE</b>	39	78	117	156	194	diameter (cm)
	1.28	2.55	3.83	5.10	6.38	diameter (ft)

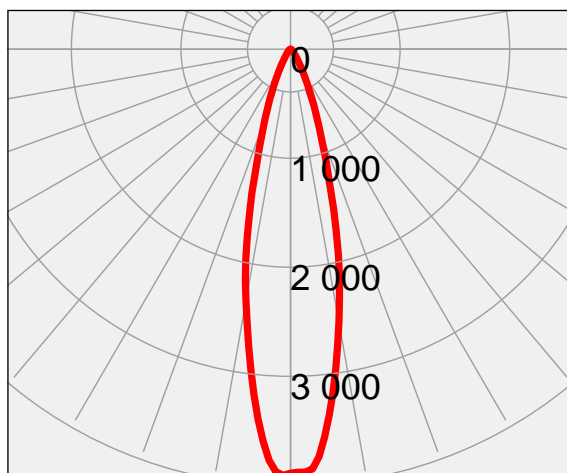

WIDE 40° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
<b>FULL RGBW</b>	5020	1255	558	466	298	lux center (lx)
	467	117	52	29	19	foot candles (fc)
<b>BEAM ANGLE</b>	73	146	218	291	364	diameter (cm)
	2.39	4.78	7.16	9.55	11.94	diameter (ft)

