


FOCUS.D ZOOM 1 IP20

EX FOCUS SOLO ZOOM IP20



FEATURES



CERTIFICATIONS



TREATMENTS

FINITURE

<input type="checkbox"/> SILVER - RAL 9006	21

LED


FULL COLOR (RGBW)	FC
HQS (RGBA)	FY

LENS


ZOOM 3.5°/52°	99

FOCUS.D ZOOM 1 IP20

03.LCB009E



TECHNICAL

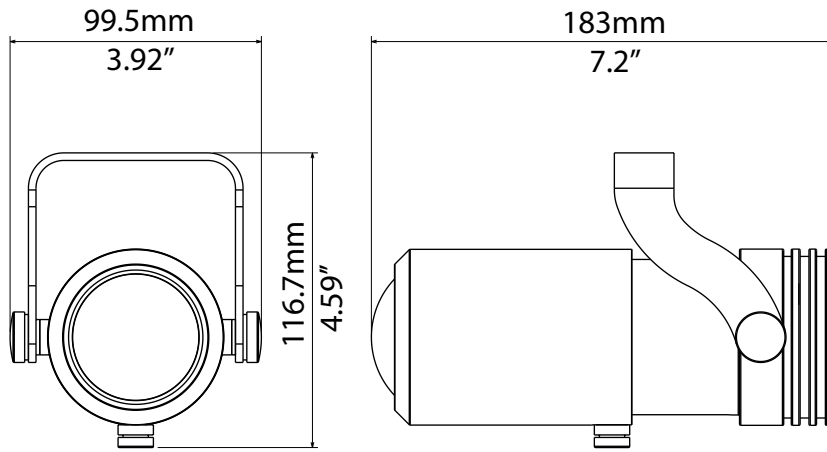

OUTPUT	• 1 x 4 color LEDs
	• Lumens output (RGBW): 429 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	• Long excursion 3.5° - 52° manual zoom
CONTROL	• DMX 512 / RDM protocols • DMX address setting and functions can be also managed by the dedicated DLC 901 remote control
DMX	• 4 DMX channels (default) • 10 channels
POWER SUPPLY	• LED driver on board • External constant voltage PSU Led driver 12 ÷ 48 VdC
	• Consumption: 10 W max
CONNECTIONS	• 90 cm end-stripped 4-pole cable fo Power and DMX
PHYSICAL	• Weight: 0.94 Kg (2 lbs)

ACCESSORIES ON REQUEST



Max 9 units parallel wired
0502T063 • Constant voltage PSU 48VdC 100W IP67
0502T056 • Constant voltage PSU 24VdC 100W IP67
0502T067 • Constant voltage PSU 12VdC 100W IP67



Max 1 unit
0509B023 • Constant voltage PSU 12VdC 20W IP67



Max. 4 units (1 item per output)
03.LA.227 • DMX Power Hub



0509C083 • 4-pole outdoor cable



03.LA.063.1 • Dongle DLC 901



03.LA.206 • DTS dongle firmware uploader



0521A010 • Safety cable - 0.3x60 cm - max. capacity load 60 Kg

PHOTOMETRIC DATA FOCUS.D ZOOM 1 IP20 - FULL COLOR (RGBW) - @ 700mA

ZOOM MIN 3.5°

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
FULL RGBW	18900	4725	2100	1181	756	lux center (lx)
	1757	439	195	110	70	foot candles (fc)
BEAM ANGLE	6	12	18	24	31	diameter (cm)
	0.20	0.40	0.60	0.80	1.00	diameter (ft)

ZOOM MAX 52°

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
FULL RGBW	477	119	53	30	19	lux center (lx)
	44	11	5	3	2	foot candles (fc)
BEAM ANGLE	98	195	293	390	488	diameter (cm)
	3.20	6.40	9.60	12.80	16.00	diameter (ft)

PHOTOMETRIC DATA VICE 1 DOWNLIGHT - HQS (RGBA) - @ 700mA

ZOOM MIN 3.5°

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
FULL RGBW						lux center (lx)
						foot candles (fc)
BEAM ANGLE						diameter (cm)
						diameter (ft)

ZOOM MAX 52°

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
FULL RGBW						lux center (lx)
						foot candles (fc)
BEAM ANGLE						diameter (cm)
						diameter (ft)