






# HELIOS.D 6

EX EOS 6 R SOLO



## FEATURES



## CERTIFICATIONS



## TREATMENTS

## FINITURE

<input type="checkbox"/>	ALUMINIUM AND STEEL	99

## LED


<input type="checkbox"/>	FULL COLOR (RGBW)	FC
<input type="checkbox"/>	HQS (RGBA)	FY

## LENS


<input type="checkbox"/>	MF - 22°	25
<input type="checkbox"/>	WF - 40°	40

HELIOS.D 6

03.EOS006E



## TECHNICAL

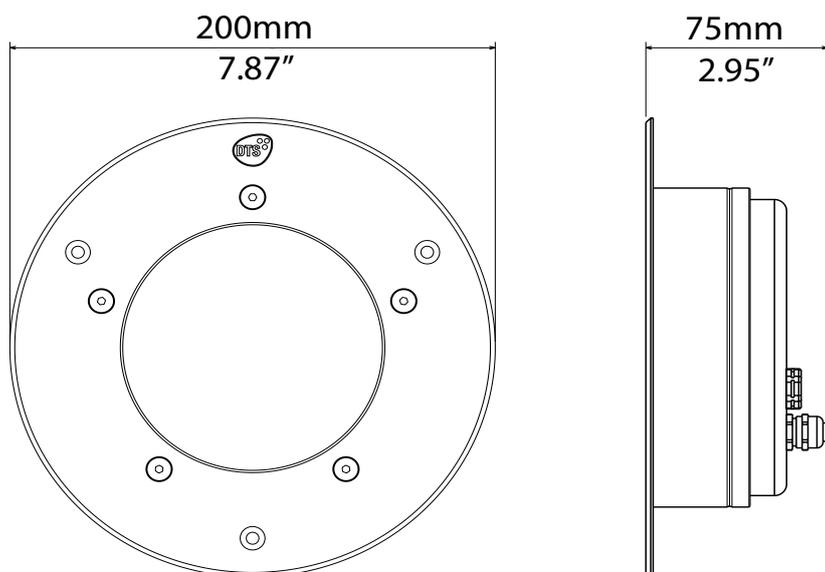

<b>OUTPUT</b>	• 6 x 4-colors LEDs
	• Lumens output (RGBW): 2,660 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
<b>OPTICAL GROUP</b>	<ul style="list-style-type: none"> <li>• Medium flood 22°</li> <li>• Wide flood 40°</li> </ul>
<b>CONTROL</b>	<ul style="list-style-type: none"> <li>• DMX 512 / RDM protocols</li> <li>• DMX address settings and functions can be also managed by the dedicated DLC 901</li> <li>• remote control</li> <li>• Internal operating system updatable via DTS dongle firmware uploader</li> </ul>
<b>DMX</b>	<ul style="list-style-type: none"> <li>• 4 DMX channels (Default)</li> <li>• 11 DMX channels</li> </ul>
<b>POWER SUPPLY</b>	<ul style="list-style-type: none"> <li>• LED driver on board</li> <li>• External constant voltage PSU LED driver 12 ÷ 48 VdC</li> </ul>
	• Consumption: 60 W max
<b>CONNECTIONS</b>	• 90 cm end-stripped 4-pole cable for Power and DMX
<b>PHYSICAL</b>	• Housing: Body in aluminium and flange in Stainless Steel
	• Weight: 2 Kg (4.41 lbs)

## ACCESSORIES ON REQUEST



**Max 1 unit**  
**0502T063** • Constant voltage PSU 48VdC 100W IP67



**Max 4 units parallel wired**  
**0502T099** • Constant voltage PSU 48VdC 240W IP67



**0509C152** • 4-pole outdoor cable



**03.LA.063.1** • Dongle DLC 901



**03.LA.206** • DTS dongle firmware uploader



**03.LA.190** • Outercase IP20 rated