


# VICE 1 DOWNLIGHT

EX VICE



## FEATURES



## CERTIFICATIONS



## TREATMENTS

## FINITURE

<input checked="" type="checkbox"/>	ALUMINIUM + RAL 9010	03
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		

## LED


<input checked="" type="checkbox"/>	FULL COLOR (RGBW)	FC
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		

## LENS


<input checked="" type="checkbox"/>	MF - 22°	25
<input checked="" type="checkbox"/>	WF - 38°	40
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		

VICE 1 DOWNLIGHT

03.LVS004E



## TECHNICAL

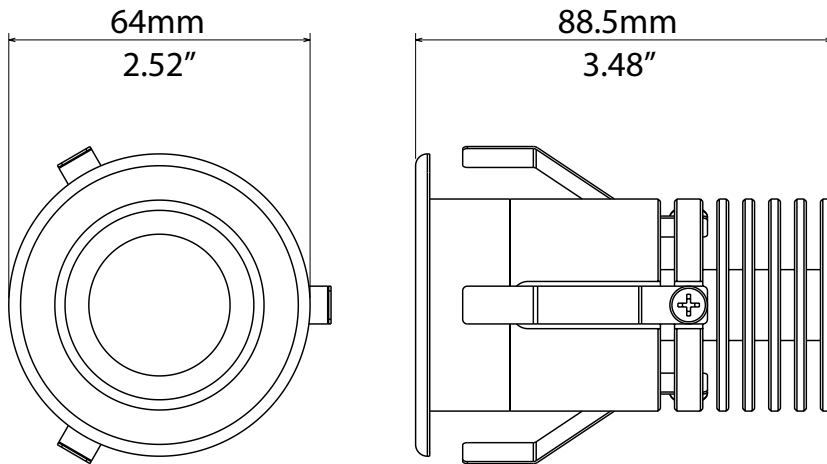

<b>OUTPUT</b>	• 1 x 4 color LEDs
	• Lumens output (RGBW): 415 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
<b>OPTICAL GROUP</b>	• Medium flood 22°
	• Wide flood 38°
<b>POWER SUPPLY</b>	• External CC PSU Led driver 700mA max per channel
	• Max distance between Drivenet PSU and fixture 100 m
<b>CONNECTIONS</b>	• Consumption: max 10 W @ 700mA
	• 1 x 90 cm end-stripped 8-pole cable
<b>PHYSICAL</b>	• Housing: Aluminium
	• Flange: 9010 finishing
	• Weight: 0.36 Kg (0.8 lbs)

## ACCESSORIES ON REQUEST



**03.LA.131** • HUB-IP20 Screw terminal 1 in / 3 out



**03.LA.131.IP56** • HUB-IP56 Screw terminal 1 in / 3 out



**0509C062.PUR** • 8-pole outdoor cable


## CONNECTIONS CHART

DRIVENET 28C DIN @48Vdc	DRIVENET 28 EZ	DRIVENET 416	DRIVENET 832	DRIVENET 1664
Max 24 (12 items per output)	Max 24 (12 items per output)	Max 48 (12 items per output)	Max 96 (12 items per output)	Max 192 (12 items per output)

PHOTOMETRIC DATA VICE 1 DOWNLIGHT - FULL COLOR (RGBW) - @ 700mA

MEDIUM 22° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
<b>FULL</b>	1751	438	195	109	70	lux center (lx)
<b>RGBW</b>	163	41	18	10	7	foot candles (fc)
<b>BEAM</b>	39	78	117	156	194	diameter (cm)
<b>ANGLE</b>	1.28	2.55	3.83	5.10	6.38	diameter (ft)

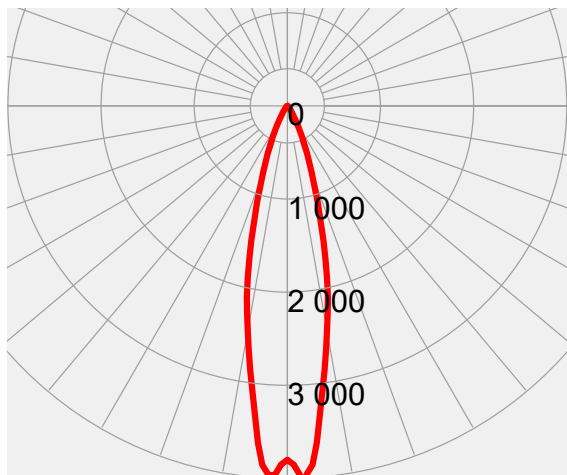

WIDE 38° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
<b>FULL</b>						lux center (lx)
<b>RGBW</b>						foot candles (fc)
<b>BEAM</b>						diameter (cm)
<b>ANGLE</b>						diameter (ft)

