



SCENA LED 120



FEATURES



FINITURE

■ BLACK - RAL 9005

LED

HQS (RGBA)

CERTIFICATIONS




TREATMENTS

SCENA LED 120

03.TS081.46.F



TECHNICAL

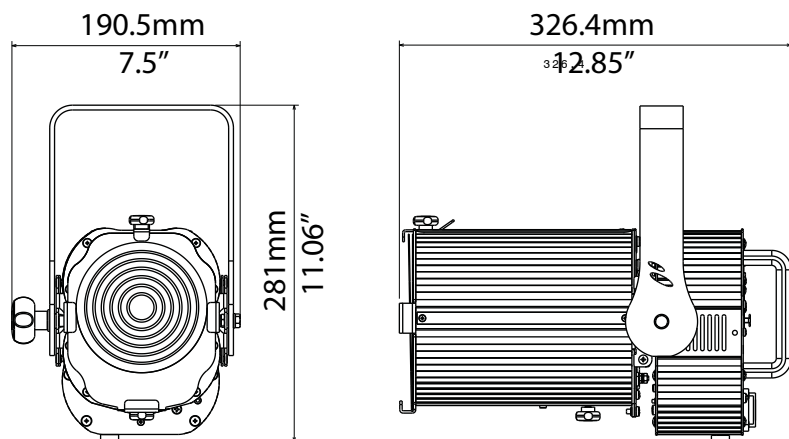

OUTPUT	• Single 4-color (RGBA) LED
	• Lumens output (RGBA: up to 2,720 @ 700mA - CRI >90)
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	<ul style="list-style-type: none"> • Ø 112 mm Fresnel lens • 20°- 74° linear zoom
DIMMER	• Hi-Q Dimming technology
CONTROL	<ul style="list-style-type: none"> • DMX 512 / RDM protocols • 4-digit 7-segment LED display + 4 soft keys • Internal operating system updatable via DTS dongle firmware uploader
DMX	<ul style="list-style-type: none"> • 10 DMX channels (default) • 4 DMX channels • 6 DMX channels • "Fine" mode • "Prom" mode
POWER SUPPLY	• Full-range 100-240Vac 50-60 Hz
	• Power consumption: 120 W max
	• Power Factor: PF >0.95
CONNECTIONS	• Power supply: PowerCON TRUE1 In&Out panel connectors
	• DMX: XLR 5-pole In&Out panel connectors
INTERNAL SAFETY DEVICES	• Overvoltage and overtemperature circuits protection
PHYSICAL	• Weight: 4.5 Kg (9.9 lbs)
ACCESSORIES INCLUDED	<ul style="list-style-type: none"> • 1 x cable with PowerCON TRUE1 female connector (code 02K0012267.0015) • 1 x FilterframeBlack finishing - already installed on the projector (code 02M00422.46)

ACCESSORIES ON REQUEST



03.TA206 • Barndoor black finishing



0521A012 • G50 "C" Clamp - max. load 10 Kg



0521A004 • G60 "C" Clamp - max. load 50 Kg



0509C158 • Outdoor DMX cable 2 x 0.25 mm² - Flame retardant



03.LA.206 • DTS Dongle firmware uploader



0521A010 • Safety cable 3 x 600 mm
Max load 30 Kg



03.LA.235 • Kit track adaptor - black finishing (Mechanical adaptor + Electrical adaptor)

PHOTOMETRIC DATA SCENA LED 120 - HQS (RGBA)

ZOOM MIN 20° @50%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
COLORS (full power)	3375	844	375	211	135	lux center (lx)
	314	78	35	20	13	foot candles (fc)
3200 K	2025	506	225	127	81	lux center (lx)
	188	47	21	12	8	foot candles (fc)
4000 K	2273	568	253	142	91	lux center (lx)
	211	53	23	13	8	foot candles (fc)
5600 K	2475	619	275	155	99	lux center (lx)
	230	58	26	14	9	foot candles (fc)
BEAM ANGLE	71	141	212	282	353	diameter (cm)
	2.31	4.63	6.94	9.26	11.57	diameter (ft)

ZOOM MAX 74° @10%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
COLORS (full power)	855	214	95	53	34	lux center (lx)
	79	20	9	5	3	foot candles (fc)
3200 K	506	127	56	32	20	lux center (lx)
	47	12	12	3	2	foot candles (fc)
4000 K	540	135	60	34	22	lux center (lx)
	50	13	6	3	2	foot candles (fc)
5600 K	608	152	68	38	24	lux center (lx)
	56	14	6	4	2	foot candles (fc)
BEAM ANGLE	301	603	904	1206	1507	diameter (cm)
	9.89	19.78	29.67	39.56	49.45	diameter (ft)