



# SCENA LED 200



## FEATURES



## FINITURE

■ BLACK - RAL 9005

## LED

TUNABLE WHITE (CT)
WHITE 3200 K
WHITE 4000 K
WHITE 5600 K

## CERTIFICATIONS




## TREATMENTS

SCENA LED 200 CT  
 SCENA LED 200 W 3200 K  
 SCENA LED 200 W 4000 K  
 SCENA LED 200 W 5600 K

03.TS051.46.F  
 03.TS046.46.F  
 03.TS048.46.F  
 03.TS064.46.F



## TECHNICAL

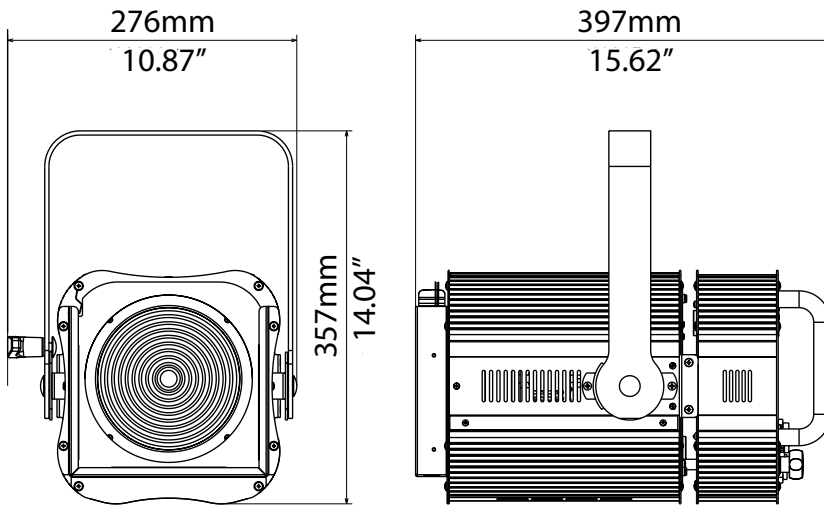

## ACCESSORIES ON REQUEST




**03.TBD04** • Barndoor black finishing



**0521A012** • G50 "C" Clamp - max. load 10 Kg



**0521A004** • G60 "C" Clamp - max. load 50 Kg



**0509C158** • Outdoor DMX cable 2 x 0.25 mm<sup>2</sup> - Flame ratardant



**03.LA.206** • DTS Dongle firmware uploader




**0521A010** • Safety cable 3 x 600 mm  
Max load 30 Kg

	SCENA LED 200 CT	SCENA LED 200 WH
OUTPUT	<ul style="list-style-type: none"> <li>Single white LED with linearly tunable color temperature (2700 K - 6500 K)</li> </ul>	<ul style="list-style-type: none"> <li>Single white LED</li> </ul>
	<ul style="list-style-type: none"> <li>Lumens output: up to 5,613 @ 700mA - CRI &gt;90</li> </ul>	<ul style="list-style-type: none"> <li>Lumens output (3200 K): up to 5,950 @ 700mA - CRI &gt;95</li> </ul>
	<ul style="list-style-type: none"> <li>LED lifespan: 50,000 hours (70% lumen output)</li> </ul>	
OPTICAL GROUP	<ul style="list-style-type: none"> <li>Ø 150 mm Fresnel lens</li> <li>6.5° - 70° linear zoom</li> </ul>	
CONTROL	<ul style="list-style-type: none"> <li>DMX 512 / RDM protocols</li> <li>4-digit 7-segment LED display + 4 soft keys</li> <li>Internal operating system updatable via DTS dongle firmware uploader</li> </ul>	
DMX	<ul style="list-style-type: none"> <li>7 DMX channels (default)</li> <li>2 DMX channels</li> <li>"CTC" mode</li> </ul>	<ul style="list-style-type: none"> <li>4 DMX channels (default)</li> <li>1 DMX channels</li> <li>"Fine" mode</li> </ul>
POWER SUPPLY	<ul style="list-style-type: none"> <li>Full-range 100-240Vac 50-60 Hz</li> <li>Power consumption: 200 W max</li> <li>Power Factor: PF &gt;0.94</li> </ul>	
CONNECTIONS	<ul style="list-style-type: none"> <li>Power supply: PowerCON TRUE1 In/Out panel connectors</li> </ul>	
	<ul style="list-style-type: none"> <li>DMX: XLR 5-pole In/Out panel connectors</li> </ul>	
INTERNAL SAFETY DEVICES	<ul style="list-style-type: none"> <li>Overvoltage and overtemperature circuits protection</li> </ul>	
PHYSICAL	<ul style="list-style-type: none"> <li>Weight: 8.6 Kg (21 lbs)</li> </ul>	<ul style="list-style-type: none"> <li>Weight: 8.5 Kg (18.5 lbs)</li> </ul>
ACCESSORIES INCLUDED	<ul style="list-style-type: none"> <li>1 x PowerCON TRUE1 female cable connector (code 0520P066)</li> <li>1 x XLR 5 pins female cable connector (code 0508B147)</li> <li>1 x XLR 5 pins male cable connector (code 0508B148)</li> <li>1 x FilterframeBlack finishing - already installed on the projector (code 02M093278.49)</li> </ul>	

## PHOTOMETRIC DATA SCENA LED 200 CT


ZOOM MIN 6.5° @50%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
<b>TUNABLE WHITE</b>	25000	6250	2778	1563	1000	lux center (lx)
	2323	581	258	145	93	foot candles (fc)
<b>BEAM ANGLE</b>	23	45	68	91	114	diameter (cm)
	0.75	1.49	2.24	2.98	3.73	diameter (ft)

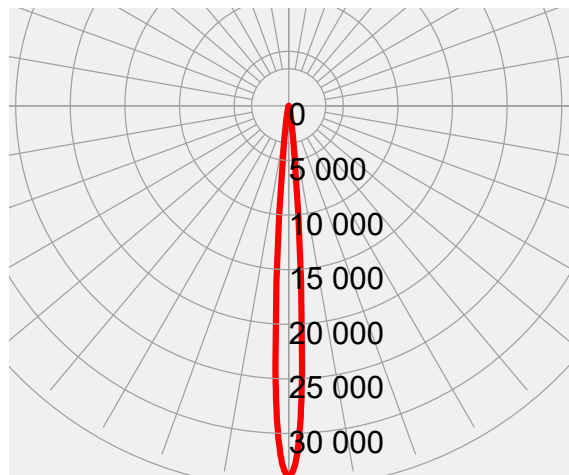

ZOOM MAX 70° @10%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
<b>TUNABLE WHITE</b>	1888	472	210	118	76	lux center (lx)
	175	44	19	11	7	foot candles (fc)
<b>BEAM ANGLE</b>	280	560	840	1120	1400	diameter (cm)
	9.19	18.38	27.57	36.76	45.94	diameter (ft)

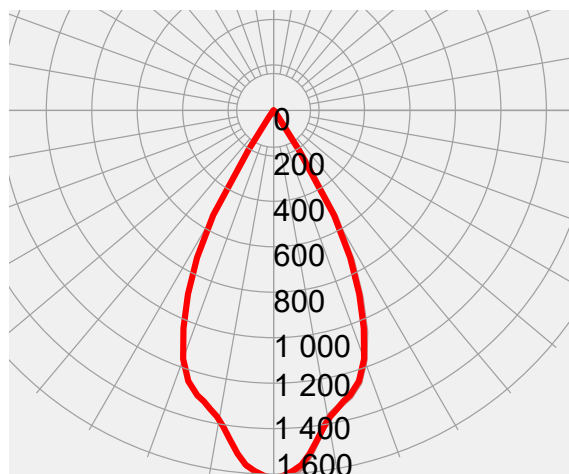

## PHOTOMETRIC DATA SCENA LED 200 WH - 3200 K

ZOOM MIN 6.5° @50%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
<b>3200 K</b>	29375	7344	3264	1836	1175	lux center (lx)
	2730	683	303	171	109	foot candles (fc)
<b>BEAM ANGLE</b>	23	45	68	91	114	diameter (cm)
	0.75	1.49	2.24	2.98	3.73	diameter (ft)


ZOOM MAX 70° @10%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
<b>3000 K</b>	2400	600	267	150	96	lux center (lx)
	223	56	25	14	9	foot candles (fc)
<b>BEAM ANGLE</b>	280	560	840	1120	1400	diameter (cm)
	9.19	18.38	27.57	36.76	45.94	diameter (ft)

## PHOTOMETRIC DATA SCENA LED 200 WH - 4000 K


ZOOM MIN 6.5° @50%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
<b>4000 K</b>	35663	8916	3963	2229	1427	lux center (lx)
	3314	829	368	207	133	foot candles (fc)
<b>BEAM ANGLE</b>	23	45	68	91	114	diameter (cm)
	0.75	1.49	2.24	2.98	3.73	diameter (ft)

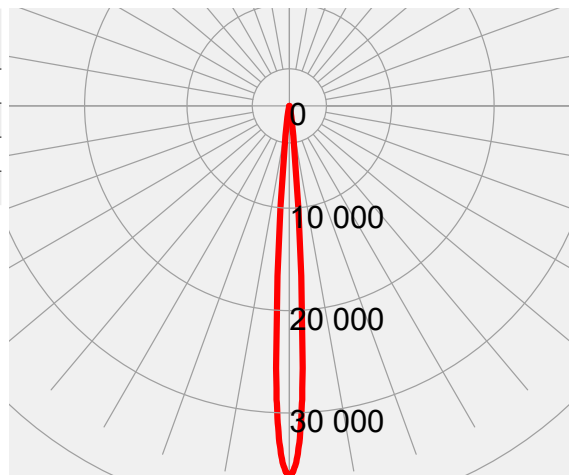

ZOOM MAX 70° @10%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
<b>4000 K</b>	2813	703	313	176	113	lux center (lx)
	261	65	29	16	10	foot candles (fc)
<b>BEAM ANGLE</b>	280	560	840	1120	1400	diameter (cm)
	9.19	18.38	27.57	36.76	45.94	diameter (ft)

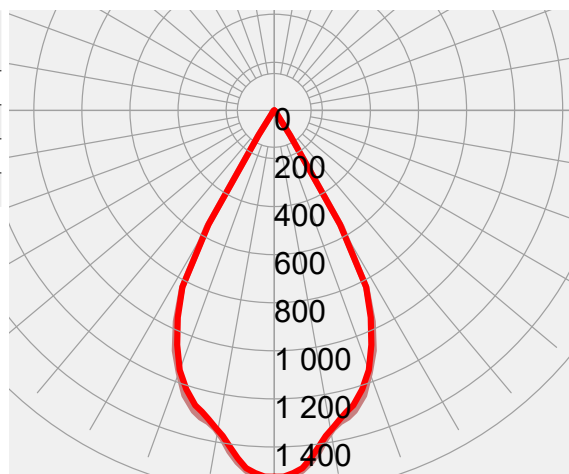

## PHOTOMETRIC DATA SCENA LED 200 WH - 5600 K

ZOOM MIN 6.5° @50%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
<b>5600 K</b>	34788	8697	3865	2174	1392	lux center (lx)
	3233	808	359	202	129	foot candles (fc)
<b>BEAM ANGLE</b>	23	45	68	91	114	diameter (cm)
	0.75	1.49	2.24	2.98	3.73	diameter (ft)

ZOOM MAX 70° @10%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
<b>5600 K</b>	2720	680	302	170	109	lux center (lx)
	253	63	28	16	10	foot candles (fc)
<b>BEAM ANGLE</b>	280	560	840	1120	1400	diameter (cm)
	9.19	18.38	27.57	36.76	45.94	diameter (ft)