


# DIVE 1



## FEATURES



## CERTIFICATIONS



## TREATMENTS

## FINITURE

BRONZE AND STEEL	99

## LED


FULL COLOR (RGBW)	FC

## LENS


MF - 22°	25
WF - 38°	40

DIVE 1

03.LPB006E



## TECHNICAL

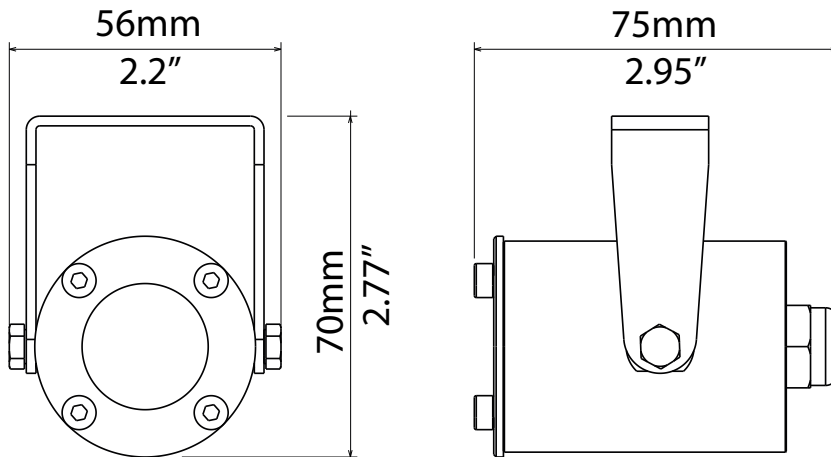

<b>OUTPUT</b>	• 1 x 4-colors LEDS
	• Lumens output (RGBW): 415 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
<b>OPTICAL GROUP</b>	• Medium flood 22°
	• Wide flood 38°
<b>POWER SUPPLY</b>	• External CC PSU Led driver 24Vdc 700mA max per channel
	• Max distance between Drivenet PSU and fixture 100 m
<b>CONNECTIONS</b>	• Consumption: max 10 W @ 700mA
	• 1 x 5 m end-stripped 8-pole cable ( <b>Pay Attention:</b> for specific lengths needs, please request to the sales manager at the time of ordering)
<b>PHYSICAL</b>	• Housing: Bronze / Stainless Steel
	• Weight: 0.8 Kg (1.76 lbs)

## ACCESSORIES ON REQUEST



**0509C113** • 8-pole underwater cable  
8 x 0.34 mm<sup>2</sup>



**03.LA.131.IP56** • HUB-IP56 Screw terminals 1 IN / 3 OUT



**03.LA.131** • HUB-IP20 Screw terminals 1 IN / 3 OUT

## CONNECTIONS CHART

DRIVENET 28C DIN @24Vdc	DRIVENET 832 24Vdc	DRIVENET 1664 24Vdc	-	-
Max 12 (6 items per output)	Max 48 (6 items per output)	Max 96 (6 items per output)	-	-

**! Caution:** Do not turn on the fixture in the absence of water



PHOTOMETRIC DATA DIVE 1 - FULL COLOR (RGBW)

MEDIUM 22° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
<b>FULL</b>	1751	438	195	109	70	lux center (lx)
<b>RGBW</b>	163	41	18	10	7	foot candles (fc)
<b>BEAM</b>	39	78	117	156	194	diameter (cm)
<b>ANGLE</b>	1.28	2.55	3.83	5.10	6.38	diameter (ft)

