



DONUT 6

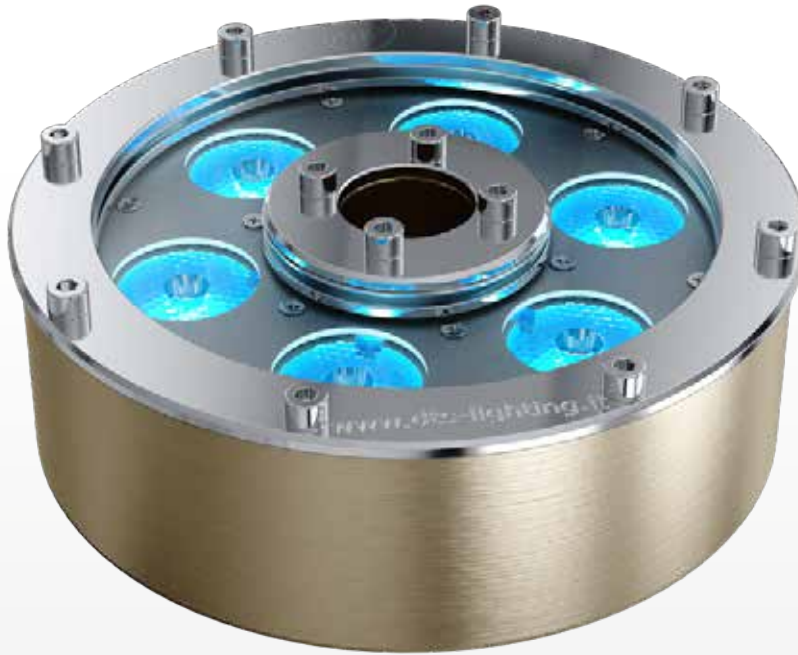

FEATURES



CERTIFICATIONS



TREATMENTS

FINITURE

BRONZE AND STEEL

LED


FULL COLOR (RGBW)*	F
HQS (RGBA)	FY

LENS

MF - 27°	25

DONUT 6


03.DN004.



*RGBW version not available for France



TECHNICAL

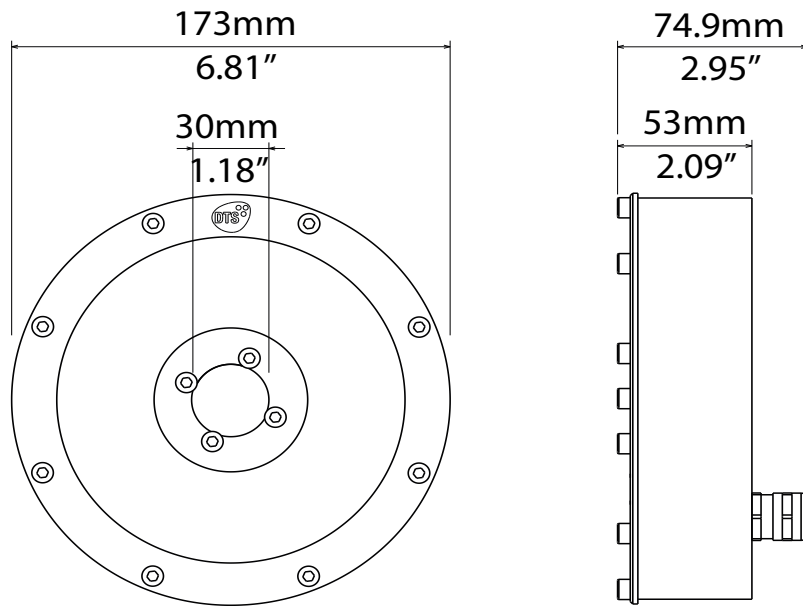

ACCESSORIES ON REQUEST



0509C123 • 8-pole underwater cable 8 x 0.25 mm²

OUTPUT	• 6 x 4-colors LEDS
	• Lumens output (RGBW): 2,350 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	• Medium flood 27°
POWER SUPPLY	• External CC PSU Led driver 24Vdc 700mA max per channel • External CC PSU Led driver 48Vdc 700mA max per channel • Max distance between PSU and fixture 100 m
	• Consumption: max 60 W @ 700mA
CONNECTIONS	• 1 x 5 m end-stripped 8-pole cable (Pay Attention: for specific lengths needs, please request to the sales manager at the time of ordering)
PHYSICAL	• Housing: Bronze / Stainless Steel
	• Weight: 5.7 Kg (12.6 lbs)

CONNECTIONS CHART

DRIVENET 28C DIN @24Vdc	-	-	DRIVENET 832 @24Vdc	DRIVENET 1664 @24Vdc
Max 2 (1 item per output)	-	-	Max 8 (1 item per output)	Max 16 (1 item per output)
DRIVENET 28C DIN @48Vdc	DRIVENET 28EZ	DRIVENET 416	DRIVENET 832	DRIVENET 1664
Max 4 (2 items per output)	Max 4 (2 items per output)	Max 8 (2 items per output)	Max 16 (2 items per output)	Max 32 (2 items per output)

! Caution: Do not turn on the fixture in the absence of water



PHOTOMETRIC DATA DONUT 6 - FULL COLOR (RGBW)

MEDIUM 27° lenses

	mt 1 ft 3.28	mt 2 ft 6.56	mt 3 ft 9.84	mt 4 ft 13.12	mt 5 ft 16.40	
FULL	7455	1864	828	466	298	lux center (lx)
RGBW	693	173	77	43	28	foot candles (fc)
BEAM	39	78	117	156	194	diameter (cm)
ANGLE	1.28	2.55	3.83	5.10	6.38	diameter (ft)

