



FOCUS.D 6

EX EOS 6 SOLO



FEATURES



CERTIFICATIONS



TREATMENTS

FINITURE

<input type="checkbox"/> SILVER - RAL 9006	21

LED


FULL COLOR (RGBW)	FC
HQS (RGBA)	FY

LENS


MF - 22°	25
WF - 40°	40

FOCUS.D 6

03.E0B006E



TECHNICAL

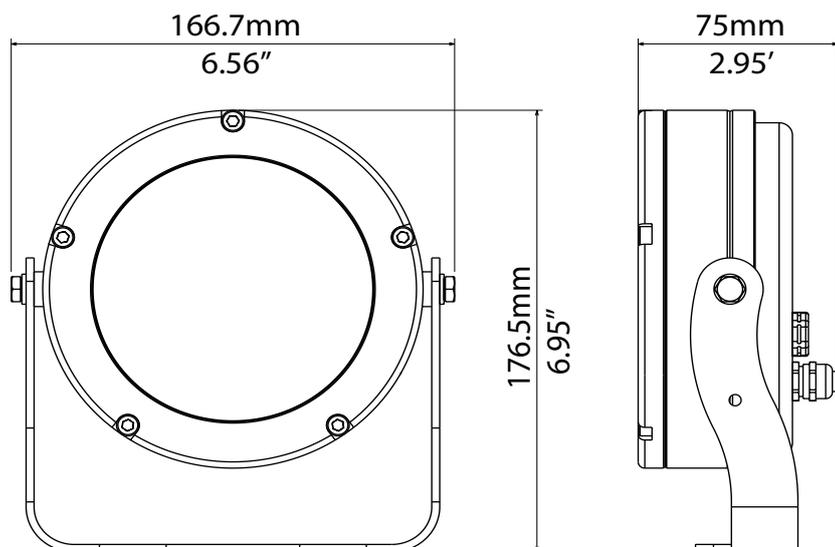

OUTPUT	• 6 x 4-colors LEDs
	• Lumens output (RGBW): 2,660 @ 700mA
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	• Medium flood 22°
	• Wide flood 40°
CONTROL	<ul style="list-style-type: none"> • DMX 512 / RDM protocols • DMX address settings and functions can be also managed by the dedicated DLC 901 • remote control • Internal operating system updatable via DTS dongle firmware uploader
DMX	<ul style="list-style-type: none"> • 4 DMX channels (Default) • 11 DMX channels
POWER SUPPLY	<ul style="list-style-type: none"> • LED driver on board • External constant voltage PSU LED driver 27 ÷ 48 VdC
	• Consumption: 60 W max
CONNECTIONS	• 90 cm end-stripped 4-pole cable for Power and DMX
PHYSICAL	• Housing: Aluminium
	• Weight: 2.2 Kg (4.85 lbs)

ACCESSORIES ON REQUEST



Max 1 unit
0502T063 • Constant voltage PSU 48VdC 100W IP67



Max 4 units parallel wired
0502T099 • Constant voltage PSU 48VdC 240W IP67



0509C152 • 4-pole outdoor cable



03.LA.063.1 • Dongle DLC 901



03.LA.151.04 • Top Hat - grey glitter finishing
 Max lenght 10 cm (3.9")



03.LA.206 • DTS dongle firmware uploader



0521A010 • Safety cable - 0.3x60 cm - max.
 capacity load 60 Kg