



FOCUS.D ZOOM 1 IP65

EX FOCUS SOLO ZOOM IP65



FEATURES



CERTIFICATIONS



TREATMENTS

FINITURE

| | |
|--|----|
| <input type="checkbox"/> SILVER - RAL 9006 | 21 |
| <input checked="" type="checkbox"/> | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

LED


| | |
|-------------------|----|
| FULL COLOR (RGBW) | FC |
| HQS (RGBA) | FY |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

LENS


| | |
|---------------|----|
| ZOOM 3.5°/52° | 99 |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

FOCUS.D ZOOM 1 IP65

03.LCB016E



TECHNICAL

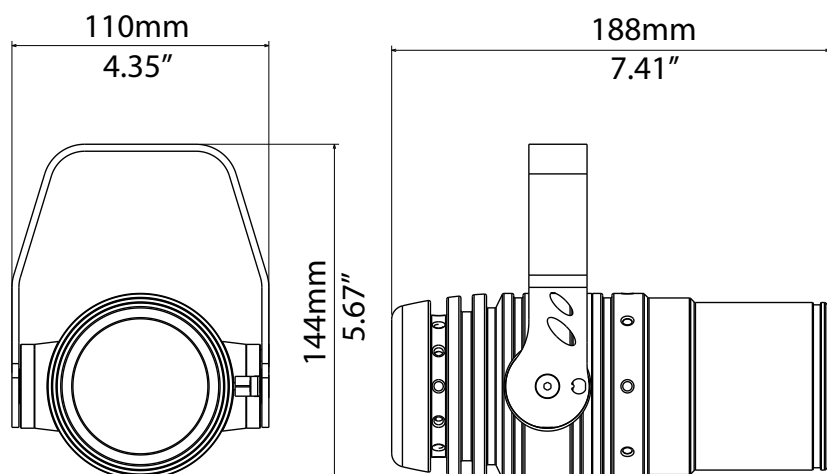

| | |
|----------------------|---|
| OUTPUT | • 1 x 4-colors LED |
| | • Lumens output (RGBW): 858 @ 700mA |
| | • LED lifespan: 50,000 hours (70% lumen output) |
| OPTICAL GROUP | • Long excursion 3.5° - 52° manual zoom |
| CONTROL | <ul style="list-style-type: none"> • DMX 512 / RDM • DMX address settings and functions can be also managed by the dedicated DLC 901 remote control • Internal operating system updatable via DTS Dongle Firmware Uploader |
| DMX | <ul style="list-style-type: none"> • 4 DMX channels (default) • 11 channels |
| POWER SUPPLY | <ul style="list-style-type: none"> • LED driver on board • External constant voltage PSU LED driver 12 ÷ 48 VdC |
| | • Consumption: max 20 W @ 700mA |
| CONNECTIONS | • 90 cm end-stripped 4-pole cable for Power and DMX |
| PHYSICAL | • Weight: 1.15 Kg (2.5 lbs) |

ACCESSORIES ON REQUEST



Max 4 units parallel wired

- 0502T063** • Constant voltage PSU 48VdC 100W IP67
- 0502T056** • Constant voltage PSU 24VdC 100W IP67
- 0502T067** • Constant voltage PSU 12VdC 100W IP67



Max 1 unit

- 0502B023** • Constant voltage PSU 12VdC 20W IP67



Max. 4 units (1 item per output)

- 03.LA.227** • DMX Power Hub



- 0509C152** • 4-pole outdoor cable 4 x 0.5 mm²



- 03.LA.063.1** • Dongle DLC 901



- 03.LA.206** • DTS dongle firmware uploader



- 03.LA.231** • Top hat




- 0521A010** • Safety cable - 0.3x60 cm - max. capacity load 60 Kg

PHOTOMETRIC DATA FOCUS.D ZOOM 1 IP65 - FULL COLOR (RGBW)

ZOOM MIN 3.5°

| | mt 1 ft 3.28 | mt 2 ft 6.56 | mt 3 ft 9.84 | mt 4 ft 13.12 | mt 5 ft 16.40 | |
|-------------------|-----------------|-----------------|-----------------|------------------|------------------|-------------------|
| FULL | 37800 | 9450 | 4200 | 2363 | 1512 | lux center (lx) |
| RGBW | 3513 | 878 | 390 | 220 | 141 | foot candles (fc) |
| BEAM ANGLE | 6 | 12 | 18 | 24 | 31 | diameter (cm) |
| | 0.20 | 0.40 | 0.60 | 0.80 | 1.00 | diameter (ft) |

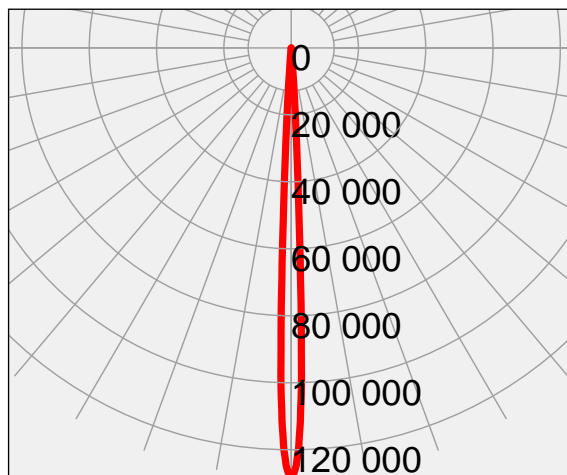

ZOOM MAX 52°

| | mt 1 ft 3.28 | mt 2 ft 6.56 | mt 3 ft 9.84 | mt 4 ft 13.12 | mt 5 ft 16.40 | |
|-------------------|-----------------|-----------------|-----------------|------------------|------------------|-------------------|
| FULL | 954 | 239 | 106 | 60 | 38 | lux center (lx) |
| RGBW | 89 | 22 | 10 | 6 | 5 | foot candles (fc) |
| BEAM ANGLE | 98 | 195 | 293 | 390 | 488 | diameter (cm) |
| | 3.20 | 6.40 | 9.60 | 12.80 | 16.00 | diameter (ft) |

