



SCENA LED 200



FEATURES



FINITURE

<input type="checkbox"/> BLACK - RAL 9005

LED

<input type="checkbox"/> FULL COLOR (RGBW)

CERTIFICATIONS




TREATMENTS

SCENA LED 200 FC

03.TS055.46.F



TECHNICAL

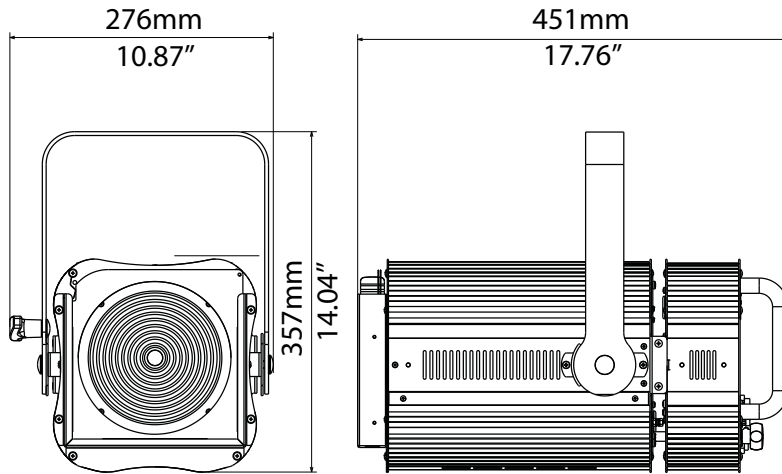

ACCESSORIES ON REQUEST




03.TBD04 • Barndoor black finishing



0521A012 • G50 "C" Clamp - max. load 10 Kg



0521A004 • G60 "C" Clamp - max. load 50 Kg



0509C158 • Outdoor DMX cable 2 x 0.25 mm² Flame retardant



03.LA.206 • DTS Dongle firmware uploader



0521A010 • Safety cable 3 x 600 mm Max load 30 Kg

OUTPUT	• Single high-power Full Color (RGBW) LED
	• Lumens output (RGBW: up to 4,975 @ 700mA)
	• Cold White CRI > 90
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	<ul style="list-style-type: none"> • Ø 150 mm Fresnel lens • 14° - 60° linear zoom
COLOR GENERATION	<ul style="list-style-type: none"> • 28 gel filters macros • Variable linear color temperature (2700 K - 8000 K)
CONTROL	<ul style="list-style-type: none"> • DMX 512 / RDM protocols • 4-digit 7-segment LED display + 4 soft keys • Internal operating system updatable via DTS dongle firmware uploader
DMX	<ul style="list-style-type: none"> • 10 DMX channels (default) • 4 DMX channels • 6 DMX channels • "Fine" mode
POWER SUPPLY	• Full-range 100-240Vac 50-60 Hz
	• Power consumption: 200 W max
	• Power Factor: PF >0.94
CONNECTIONS	• Power supply: PowerCON TRUE1 In/Out panel connectors
	• DMX: XLR 5-pole In/Out panel connectors
INTERNAL SAFETY DEVICES	• Overvoltage and overtemperature circuits protection
PHYSICAL	• Weight: 9.4 Kg (20.7 lbs)
ACCESSORIES INCLUDED	<ul style="list-style-type: none"> • 1 x PowerCON TRUE1 female cable connector (code 0520P066) • 1 x XLR 5 pins female cable connector (code 0508B147) • 1 x XLR 5 pins male cable connector (code 0508B148) • 1 x FilterframeBlack finishing - already installed on the projector (code 02M093278.49)



PHOTOMETRIC DATA SCENA LED 200 - FULL COLOR (RGBW)

ZOOM MIN 14° @50%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
FULL RGBW	15744	3936	1749	984	630	lux center (lx)
	1463	366	163	91	59	foot candles (fc)
BEAM ANGLE	49	98	147	196	246	diameter (cm)
	1.61	3.22	4.83	6.45	8.06	diameter (ft)

ZOOM MAX 60° @10%

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81	
FULL RGBW	4081	1020	453	255	163	lux center (lx)
	379	95	42	24	15	foot candles (fc)
BEAM ANGLE	231	462	693	924	1155	diameter (cm)
	7.58	15.15	22.73	30.31	37.88	diameter (ft)