


DOCTUS.D 3



FEATURES



CERTIFICATIONS



TREATMENTS



FINITURE

<input checked="" type="checkbox"/>	SILVER	28
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		

LED

<input checked="" type="checkbox"/>	FULL COLOR (RGBW)	FC
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		

LENS


<input type="checkbox"/>	SP - 10°	10
<input type="checkbox"/>	MF - 25°	25
<input type="checkbox"/>	WF - 35°	40
<input type="checkbox"/>	40°x12°	E1
<input type="checkbox"/>	12°x40°	E2
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		

FILTER


<input type="checkbox"/>	NO FILTER	/
<input type="checkbox"/>	HONEY COMB	A
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>		

DOCTUS.D 3

03.DTB008E



TECHNICAL

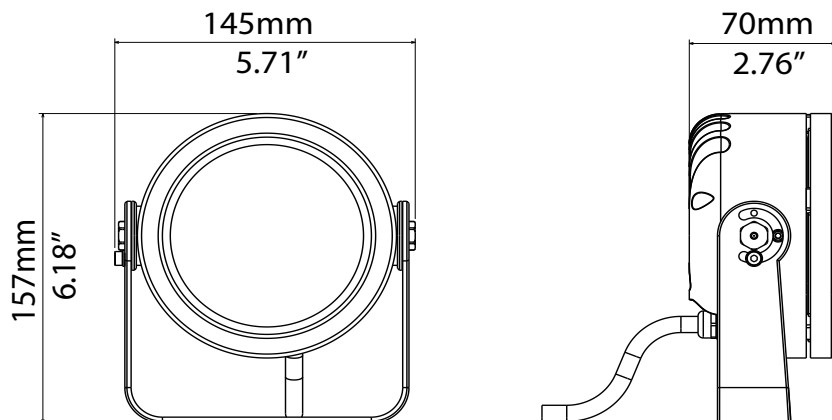

OUTPUT	<ul style="list-style-type: none"> • 3 x 4-colors LEDs (RGBW) or RGBA
	<ul style="list-style-type: none"> • LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	<ul style="list-style-type: none"> • Narrow flood 10° • Medium flood 25° • Wide flood 35° • Elliptical 40°x12° • Elliptical 12°x40°
CONTROL	<ul style="list-style-type: none"> • DMX 512 / RDM protocols • Firmware updatable via DTS firmware uploader dongle
DMX	<ul style="list-style-type: none"> • 4 DMX channels (Default) • 11 channels
POWER SUPPLY	<ul style="list-style-type: none"> • LED driver on board • External constant voltage PSU LED driver 24 ÷ 48 VdC
	<ul style="list-style-type: none"> • Consumption: max 30 W
CONNECTIONS	<ul style="list-style-type: none"> • 5 m end-stripped 4-pole cable for Power and DMX
PHYSICAL	<ul style="list-style-type: none"> • Housing: Aluminium • Weight: 1.7 Kg (3.74 lbs) - Product's weight includes 5 m (197") cable

ACCESSORIES ON REQUEST



0502T063 • Constant voltage PSU 48VdC 100W IP67



0502T056 • Constant voltage PSU 24VdC 100W IP67



0502T099 • Constant voltage PSU 240W-48Vdc IP67 ON-OFF




0502T102 • Constant voltage PSU 90W-30Vdc IP67 ON-OFF




0509C152 • 4-pole outdoor cable 4 x 0.5 mm²




03.LA.063.1 • Dongle DLC 901



03.LA.206 • DTS firmware uploader dongle



03.LA.247 • Top hat



0521A010 • Safety cable - 3 x 600 mm - max. capacity load 30 Kg (66 lbs)